

LUXART



ALL ABOUT LIGHTING.



PRODUCT LINE

MINI SERIES



LXT 0709 Magnetic



LXT 0806



LXT 0808



LXT 0809



LXT 0812 Magnetic



LXT 0911 3-side



LXT 1010



LXT 1013

RECT SERIES



LXT 1213



LXT 1509



LXT 1514




LXT 1613



LXT 1809



LXT 1725 3-Side



LXT 1814



LXT 2010



LXT 2020



LXT 2310



LXT 3010



LXT 3020

ROUND SERIES



LXT 0910R



LXT 1108R



LXT 1309R




LXT 1113R



LXT 1721R



LXT 1408R



LXT 1915R



LXT 2000R

OPTIC SERIES



LXT 1312 Asym



LXT 1313 Focus



LXT 1212 Back-lit

PRODUCT LINE

CORNER SERIES



LXT 0811C Magnetic



LXT 0808C



LXT 1010C



LXT 1111C



LXT 1313C




LXT 1412C Magnetic



LXT 1616C

LINEAR SERIES



LXT 2020 Glow



LXT 3020 Glow



LXT 3030 Glow



LXT 4030 Glow



LXT 4040 Glow



LXT 5035 Glow



LXT 5050 Glow



LXT 4070 Glow



LXT 5070 Glow



LXT 6075 Glow



LXT 7090 Glow

NEON SERIES



LXT 0408S Flex



LXT 0606T Flex



LXT 0808T Flex



LXT 1010S Flex




LXT 1010T Flex



LXT 1212S Flex



LXT 1212T Flex



LXT 1616C Flex




LXT 1616 3D Flex

ETC




SMPS CASE



Fabric Panel



Snap Frame Panel



Light Guide Panel

S/C SPOT
SERIES



LXT0809S




LXT0809S



LXT0809S



LXT0809S



LXT0809S



LXT0809S



LXT0809S



LXT0809S

LINEAR LIGHTING **MINI SERIES**



LXT 0709 Magnetic

LXT 0806

LXT 0808

LXT 0809

LXT 0812 Magnetic

LXT 0911 3-Side

LXT 1010

LXT 1013

LXT 0709 Magnetic

Mini Profile with PC Cover
Single-Side Flat Cover Type
Detachable Magnetic Installation for Shelves



연색성 CRI
Ra 85 / 90 / 95

소비전력(최대) Watt/M(Max)
16 w/m

색온도 Color Temp.
2700K / 3000K / 3500K / 4000K / 5000K / 6000K



제작가능길이 Available length
50~2,000mm

발광각도 Beam Angle
120°

동작온도 Operating Temp.
-10°C to +45°C

마감 Housing
Anodized Aluminum

커버 Cover
Diffused PC



12V 12.5mm cut
10W/m Ra90+
240LED/m Dotless



12V 10mm cut
8W/m Ra90+
400LED/m Dotless



24V 25mm cut
16W/m Ra90+
240LED/m Dotless



Magnetic



Mount Clip




External SMPS



LXT 0806

Micro Profile with PC Cover
Single-Side Flat Cover Type
Adhesive Tape Installation or Mount Clip Installation
for Shelves

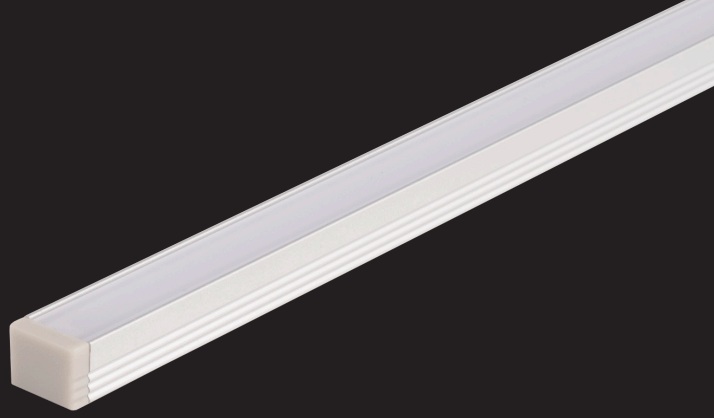

연색성 CRI
Ra 85 / 90 / 95

소비전력(최대) Watt/M(Max)
16 w/m

색온도 Color Temp.
2700K / 3000K / 3500K / 4000K / 5000K / 6000K



제작가능길이 Available length
50~3,000mm

발광각도 Beam Angle
120°

동작온도 Operating Temp.
-10°C to +45°C

마감 Housing
Anodized Aluminum

커버 Cover
Diffused PC



12V 12.5mm cut
10W/m Ra90+
240LED/m Dotless



12V 10mm cut
8W/m Ra90+
400LED/m Dotless



24V 25mm cut
16W/m Ra90+
240LED/m Dotless



Adhesive Tape



Mount Clip



External SMPS




ALL ABOUT LIGHTING.

W. www.luxart.kr T. 031 591 2700 E. sales@luxart.kr A. 195-17, Biryong-ro, Hwado-eup, Namyangju-si, Gyeonggi-do, Republic of Korea

LXT 0808

Micro Profile with PC Cover
Single-Side Flat Cover Type
Adhesive Tape Installation or Mount Clip Installation
for Shelves

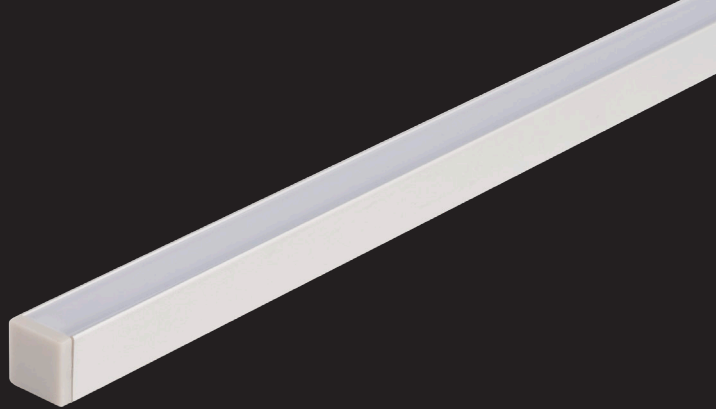

연색성 CRI
Ra 85 / 90 / 95

소비전력(최대) Watt/M(Max)
10 W/m

색온도 Color Temp.
2700K / 3000K / 3500K / 4000K / 5000K / 6000K


제작가능길이 Available length
50~2,000mm

발광각도 Beam Angle
120°

동작온도 Operating Temp.
-10°C to +45°C

마감 Housing
Anodized Aluminum

커버 Cover
Diffused PC



12V 12.5mm cut
10W/m Ra90+
240LED/m Dotless



12V 10mm cut
8W/m Ra90+
400LED/m Dotless



24V 25mm cut
16W/m Ra90+
240LED/m Dotless



Adhesive Tape



Mount Clip




External SMPS



LXT 0809

Micro Profile with PC Cover
Single-Side Flat Cover Type
Adhesive Tape Installation or Mount Clip Installation
for Shelves

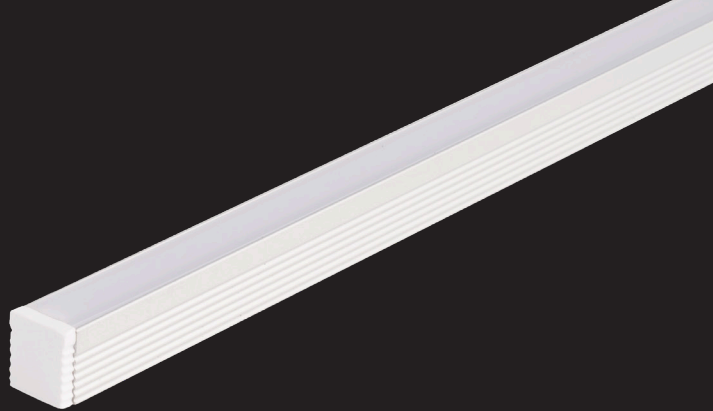

연색성 CRI
Ra 85 / 90 / 95

소비전력(최대) Watt/M(Max)
16 w/m

색온도 Color Temp.
2700K / 3000K / 3500K / 4000K / 5000K / 6000K


제작가능길이 Available length
50~3,000mm

발광각도 Beam Angle
120°


동작온도 Operating Temp.
-10°C to +45°C

마감 Housing
Anodized Aluminum

커버 Cover
Diffused PC



12V 25mm cut
16W/m Ra80+
120LED/m Dotless



12V 27.7mm cut
9W/m Ra80+
152LED/M Dotless



12V 12.5mm cut
10W/m Ra90+
240LED/m Dotless



12V 8.33mm cut
10W/m Ra90+
120LED/m Dotless



24V 25mm cut
16W/m Ra90+
240LED/m Dotless



Adhesive Tape



Mount Clip



External SMPS




ALL ABOUT LIGHTING.

W. www.luxart.kr T. 031 591 2700 E. sales@luxart.kr A. 195-17, Biryong-ro, Hwado-eup, Namyangju-si, Gyeonggi-do, Republic of Korea

LXT 0812 Magentic

Profile with PC Cover
Single-Side Flat Cover Type
Detachable Magnetic Installation or Mount Clip Installation
for Shelves

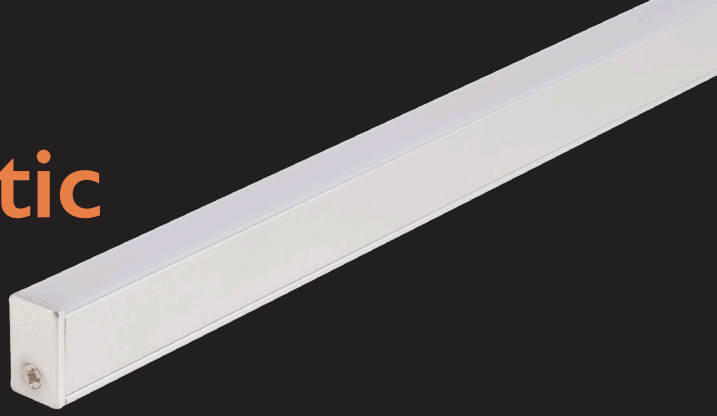

연색성 CRI
Ra 85 / 90 / 95

소비전력(최대) Watt/M(Max)
16 w/m

색온도 Color Temp.
2700K / 3000K / 3500K / 4000K / 5000K / 6000K



제작가능길이 Available length
50~3,000mm

발광각도 Beam Angle
120°


동작온도 Operating Temp.
-10°C to +45°C

마감 Housing
Anodized Aluminum


커버 Cover
Diffused PC




12V 25mm cut
16W/m Ra80+
120LED/m Dotless



12V 27.7mm cut
9W/m Ra80+
152LED/m Dotless



12V 12.5mm cut
10W/m Ra90+
240LED/m Dotless



12V 8.33mm cut
10W/m Ra90+
120LED/m Dotless



Magnetic



Mount Clip



External SMPS



LUXART

ALL ABOUT LIGHTING.

W. www.luxart.kr T. 031 591 2700 E. sales@luxart.kr A. 195-17, Biryong-ro, Hwado-eup, Namyangju-si, Gyeonggi-do, Republic of Korea

LXT 0911 3-Side

Profile with PC Cover
Three-Sided Emitting Cover Type
Adhesive Tape or Mount Clip Installation for Shelves



연색성 CRI
Ra 85 / 90 / 95

소비전력(최대) Watt/M(Max)
16 w/m

색온도 Color Temp.
2700K / 3000K / 3500K / 4000K / 5000K / 6000K



제작가능길이 Available length
50~3,000mm

발광각도 Beam Angle
120°


동작온도 Operating Temp.
-10°C to +45°C

마감 Housing
Anodized Aluminum

커버 Cover
Diffused PC




12V 25mm cut
16W/m Ra80+
120LED/m Dotless



12V 27.7mm cut
9W/m Ra80+
152LED/m Dotless



12V 12.5mm cut
10W/m Ra90+
240LED/m Dotless



12V 8.33mm cut
10W/m Ra90+
120LED/m Dotless



Adhesive Tape



Mount Clip



External SMPS




ALL ABOUT LIGHTING.

W. www.luxart.kr T. 031 591 2700 E. sales@luxart.kr A. 195-17, Biryong-ro, Hwado-eup, Namyangju-si, Gyeonggi-do, Republic of Korea

LXT 1010

Profile with PC Cover
Single-Side Flat Cover Type
Adhesive Tape Installation or Mount Clip Installation
for Shelves

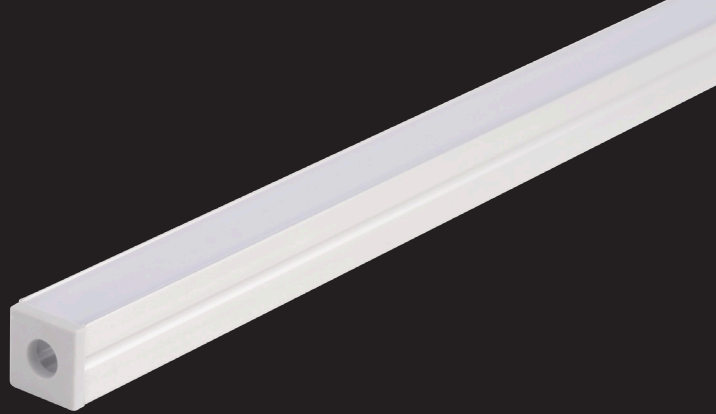

연색성 CRI
Ra 85 / 90 / 95

소비전력(최대) Watt/M(Max)
16 w/m

색온도 Color Temp.
2700K / 3000K / 3500K / 4000K / 5000K / 6000K



제작가능길이 Available length
50~3,000mm

발광각도 Beam Angle
120°


동작온도 Operating Temp.
-10°C to +45°C

마감 Housing
Anodized Aluminum

커버 Cover
Diffused PC




12V 25mm cut
16W/m Ra90+
120LED/m Dotless



12V 27.7mm cut
9W/m Ra90+
152LED/m Dotless



12V 12.5mm cut
10W/m Ra90+
240LED/m Dotless



12V 8.33mm cut
10W/m Ra90+
120LED/m Dotless



Adhesive Tape



Mount Clip




External SMPS



LXT 1013

Profile with PC Cover
Single-Side Flat Cover Type
Adhesive Tape Installation or Mount Clip Installation
for Shelves

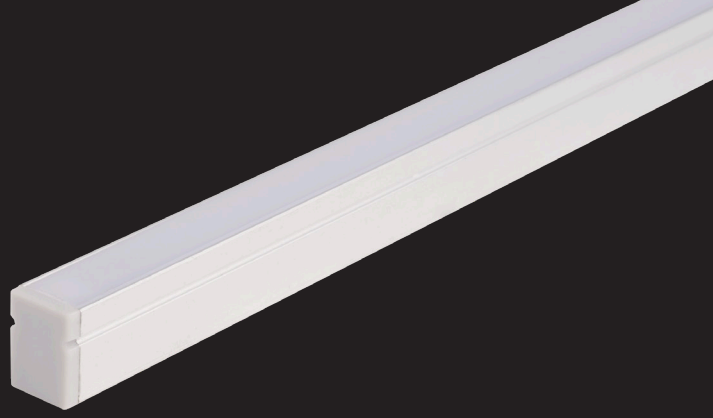

연색성 CRI
Ra 85 / 90 / 95

소비전력(최대) Watt/M(Max)
16 w/m

색온도 Color Temp.
2700K / 3000K / 3500K / 4000K / 5000K / 6000K



제작가능길이 Available length
50~3,000mm

발광각도 Beam Angle
120°


동작온도 Operating Temp.
-10°C to +45°C

마감 Housing
Anodized Aluminum


커버 Cover
Diffused PC




12V 25mm cut
16W/m CRI 85
120LED/m Dotless



12V 27.7mm cut
9W/m CRI 85
152LED/m Dotless



12V 12.5mm cut
10W/m CRI 90
240LED/m Dotless



12V 8.33mm cut
10W/m CRI 90
120LED/m Dotless



Adhesive Tape



Mount Clip




External SMPS



LINEAR LIGHTING

RECT SERIES



LXT 1213
LXT 1509
LXT 1514
LXT 1613
LXT 1809
LXT 1725 3-Side
LXT 1814
LXT 2010
LXT 2020
LXT 2310
LXT 3010
LXT 3020

LXT 1213

Profile with PC Cover
Single-Side Flat Cover Type
Adhesive Tape Installation or Mount Clip Installation
for Shelves



연색성 CRI
Ra 85 / 90 / 95

소비전력(최대) Watt/M(Max)
16 w/m

색온도 Color Temp.
2700K / 3000K / 3500K / 4000K / 5000K / 6000K



제작가능길이 Available length
50~3,000mm

발광각도 Beam Angle
120°


동작온도 Operating Temp.
-10°C to +45°C

마감 Housing
Anodized Aluminum


커버 Cover
Diffused PC



12V 25mm cut
16W/m Ra80+
120LED/m Dotless



12V 27.7mm cut
9W/m Ra80+
152LED/m Dotless




12V 8.33mm cut
10W/m Ra90+
120LED/m Dotless



12V 25mm cut
12W/m Ra90+
480LED/m Dotless



24V 25mm cut
13W/m Ra90+
120LED/m Dotless



24V 8.33mm cut
10W/m Ra90+
120LED/m Dotless




Adhesive Tape



Mount Clip



External SMPS

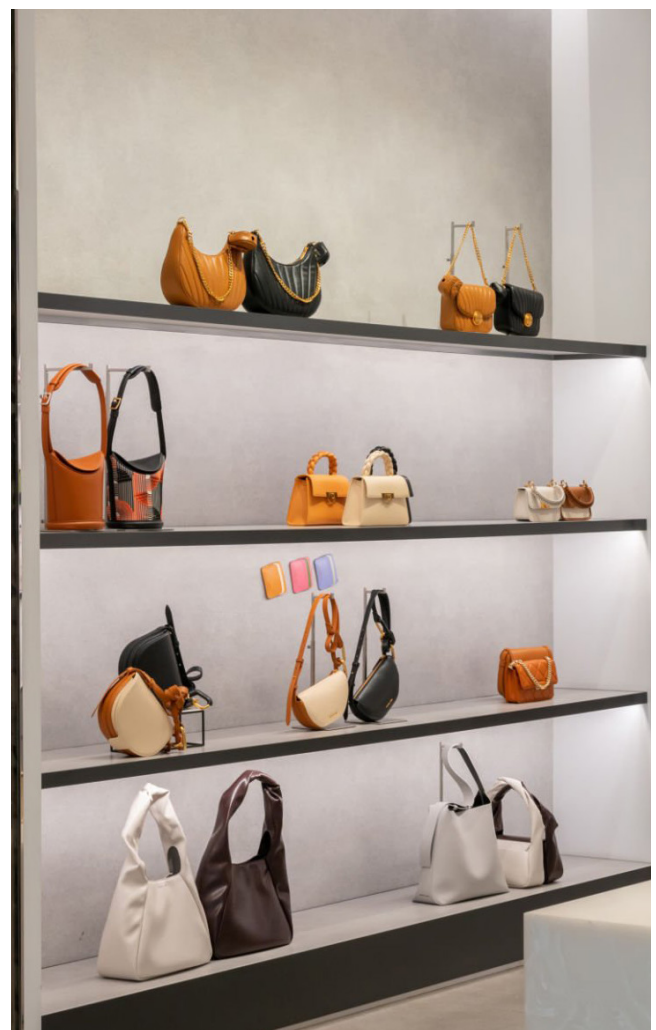

LXT 1509

Profile with PC Cover
Single-Side Flat Cover Type
Adhesive Tape Installation or Mount Clip Installation
For Shelves or Indirect Lighting



연색성 CRI
Ra 85 / 90 / 95

소비전력(최대) Watt/M(Max)
16 w/m

색온도 Color Temp.
2700K / 3000K / 3500K / 4000K / 5000K / 6000K



제작가능길이 Available length
50~3,000mm

발광각도 Beam Angle
120°


동작온도 Operating Temp.
-10°C to +45°C

마감 Housing
Anodized Aluminum


커버 Cover
Diffused PC



12V 25mm cut
16W/m Ra80+
120LED/m Dotless



12V 27.7mm cut
9W/m Ra80+
152LED/m Dotless




12V 8.33mm cut
10W/m Ra90+
120LED/m Dotless



12V 25mm cut
12W/m Ra90+
480LED/m Dotless



24V 25mm cut
13W/m Ra90+
120LED/m Dotless



24V 8.33mm cut
10W/m Ra90+
120LED/m Dotless




Adhesive Tape



Mount Clip



External SMPS

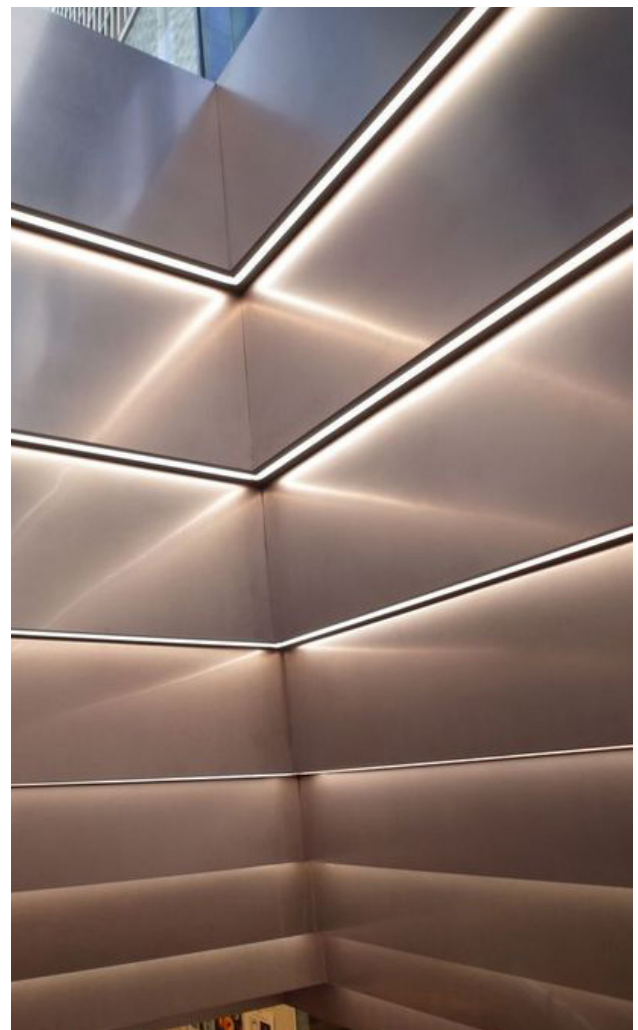

ALL ABOUT LIGHTING.

W. www.luxart.kr T. 031 591 2700 E. sales@luxart.kr A. 195-17, Biryong-ro, Hwado-eup, Namyangju-si, Gyeonggi-do, Republic of Korea

LXT 1514

Profile with PC Cover
Single-Side Flat Cover Type
Adhesive Tape Installation or Mount Clip Installation
For Shelves or Indirect Lighting



연색성 CRI
Ra 85 / 90 / 95

소비전력(최대) Watt/M(Max)
16 w/m

색온도 Color Temp.
2700K / 3000K / 3500K / 4000K / 5000K / 6000K


제작가능길이 Available length
50~3,000mm

발광각도 Beam Angle
120°


동작온도 Operating Temp.
-10°C to +45°C

마감 Housing
Anodized Aluminum


커버 Cover
Diffused PC



12V 25mm cut
16W/m Ra80+
120LED/m Dotless



12V 27.7mm cut
9W/m Ra80+
152LED/m Dotless




12V 8.33mm cut
10W/m Ra90+
120LED/m Dotless



24V 25mm cut
19.5W/m Ra90+
240LED/m Dotless



24V 25mm cut
13W/m Ra90+
120LED/m Dotless



24V 8.33mm cut
10W/m Ra90+
120LED/m Dotless




Adhesive Tape



Mount Clip



External SMPS

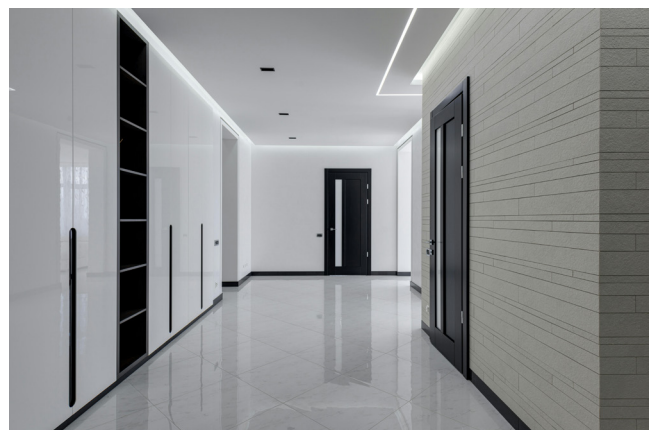

LXT 1613

Profile with PC Cover
Single-Side Flat Cover Type
Adhesive Tape Installation or Mount Clip Installation
For Shelves or Indirect Lighting



연색성 CRI
Ra 85 / 90 / 95

소비전력(최대) Watt/M(Max)
16 w/m

색온도 Color Temp.
2700K / 3000K / 3500K / 4000K / 5000K / 6000K



제작가능길이 Available length
50~3,000mm

발광각도 Beam Angle
120°


동작온도 Operating Temp.
-10°C to +45°C

마감 Housing
Anodized Aluminum


커버 Cover
Diffused PC



12V 25mm cut
16W/m Ra80+
120LED/m Dotless



12V 27.7mm cut
9W/m Ra80+
152LED/m Dotless




12V 8.33mm cut
10W/m Ra90+
120LED/m Dotless



24V 25mm cut
19.5W/m Ra90+
240LED/m Dotless



24V 25mm cut
13W/m Ra90+
120LED/m Dotless



24V 8.33mm cut
10W/m Ra90+
120LED/m Dotless




Adhesive Tape



Mount Clip



External SMPS

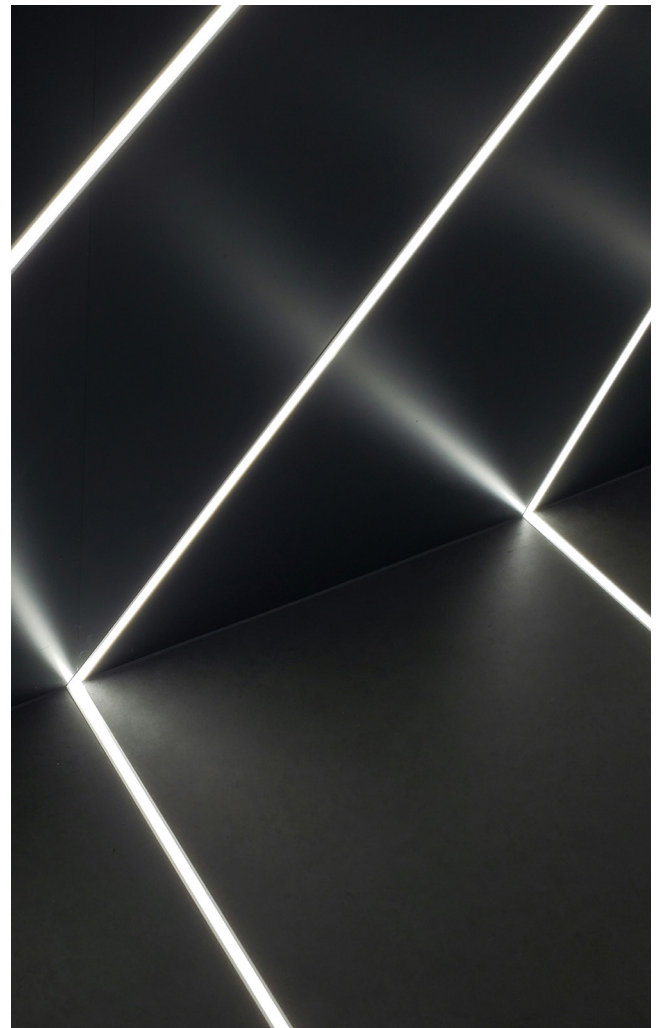


ALL ABOUT LIGHTING.

W. www.luxart.kr T. 031 591 2700 E. sales@luxart.kr A. 195-17, Biryong-ro, Hwado-eup, Namyangju-si, Gyeonggi-do, Republic of Korea

LXT 1809

Profile with PC Cover
Single-Side Flat Cover Type
Adhesive Tape Installation or Mount Clip Installation
For Shelves or Indirect Lighting

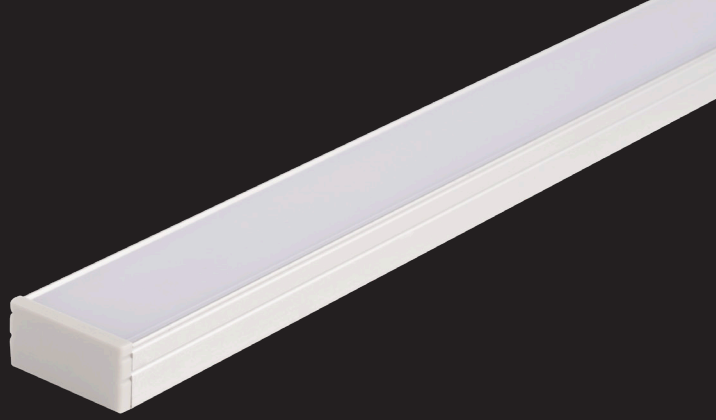

연색성 CRI
Ra 85 / 90 / 95

소비전력(최대) Watt/M(Max)
16 w/m

색온도 Color Temp.
2700K / 3000K / 3500K / 4000K / 5000K / 6000K



제작가능길이 Available length
50~3,000mm

발광각도 Beam Angle
120°


동작온도 Operating Temp.
-10°C to +45°C

마감 Housing
Anodized Aluminum

커버 Cover
Diffused PC



12V 25mm cut
16W/m Ra80+
120LED/m



12V 27.7mm cut
9W/m Ra80+
152LED/m Dotless



12V 25mm cut
12W/m Ra90+
480LED/m Dotless



24V 25mm cut
19.5W/m Ra90+
240LED/m Dotless



24V 25mm cut
13W/m Ra90+
120LED/m




Adhesive Tape



Mount Clip



External SMPS

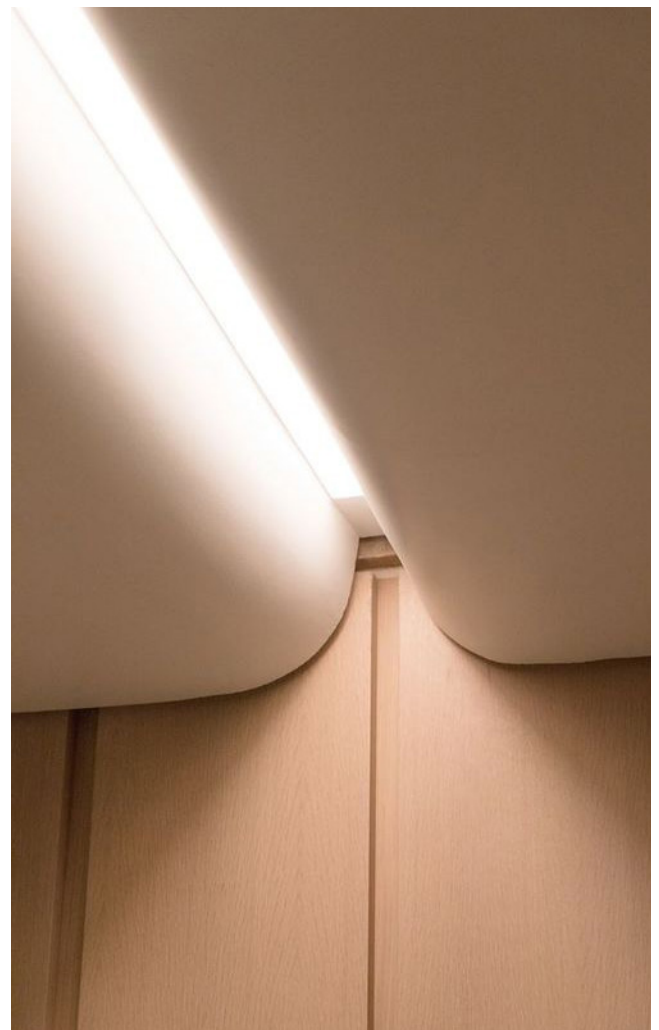

LXT 1725 3-Side

Profile with PC Cover
Three-Sided Emitting Cover Type
Adhesive Tape Installation or Mount Clip Installation
For Shelves or Indirect Lighting



연색성 CRI
Ra 85 / 90 / 95

소비전력(최대) Watt/M(Max)
16 w/m

색온도 Color Temp.
2700K / 3000K / 3500K / 4000K / 5000K / 6000K



제작가능길이 Available length
50~3,000mm

발광각도 Beam Angle
120°


동작온도 Operating Temp.
-10°C to +45°C

마감 Housing
Anodized Aluminum


커버 Cover
Diffused PC



12V 25mm cut
16W/m
120LED/m Dotless



12V 27.7mm cut
9W/m
152LED/m Dotless




12V 8.33mm cut
10W/m Ra90+
120LED/m Dotless



24V 25mm cut
19.5W/m Ra90+
240LED/m Dotless



24V 25mm cut
13W/m Ra90+
120LED/m Dotless



24V 8.33mm cut
10W/m Ra90+
120LED/m Dotless



Adhesive Tape



Mount Clip



External SMPS




ALL ABOUT LIGHTING.

W. www.luxart.kr T. 031 591 2700 E. sales@luxart.kr A. 195-17, Biryong-ro, Hwado-eup, Namyangju-si, Gyeonggi-do, Republic of Korea

LXT 1814

Profile with PC Cover
Single-Side Flat Cover Type
Adhesive Tape Installation or Mount Clip Installation
For Shelves or Indirect Lighting

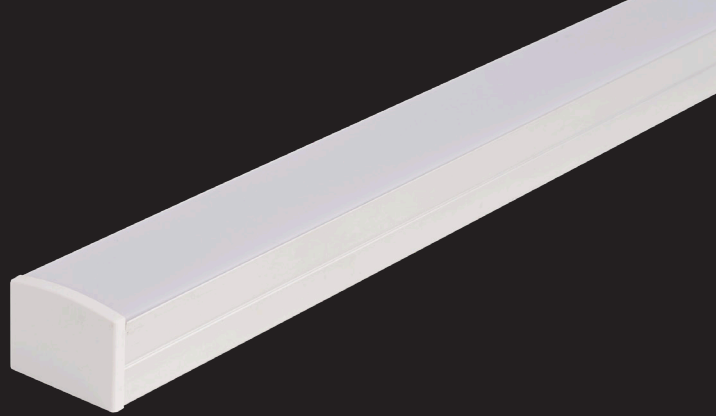

연색성 CRI
Ra 85 / 90 / 95

소비전력(최대) Watt/M(Max)
16 w/m

색온도 Color Temp.
2700K / 3000K / 3500K / 4000K / 5000K / 6000K



제작가능길이 Available length
50~3,000mm

발광각도 Beam Angle
120°


동작온도 Operating Temp.
-10°C to +45°C

마감 Housing
Anodized Aluminum


커버 Cover
Diffused PC



12V 25mm cut
16W/m Ra80+
120LED/m Dotless



12V 27.7mm cut
9W/m Ra80+
152LED/m Dotless




12V 8.33mm cut
10W/m Ra90+
120LED/m Dotless



24V 25mm cut
19.5W/m Ra90+
240LED/m Dotless



24V 25mm cut
13W/m Ra90+
120LED/m Dotless



24V 8.33mm cut
10W/m Ra90+
10LED/m Dotless




Adhesive Tape



Mount Clip



External SMPS

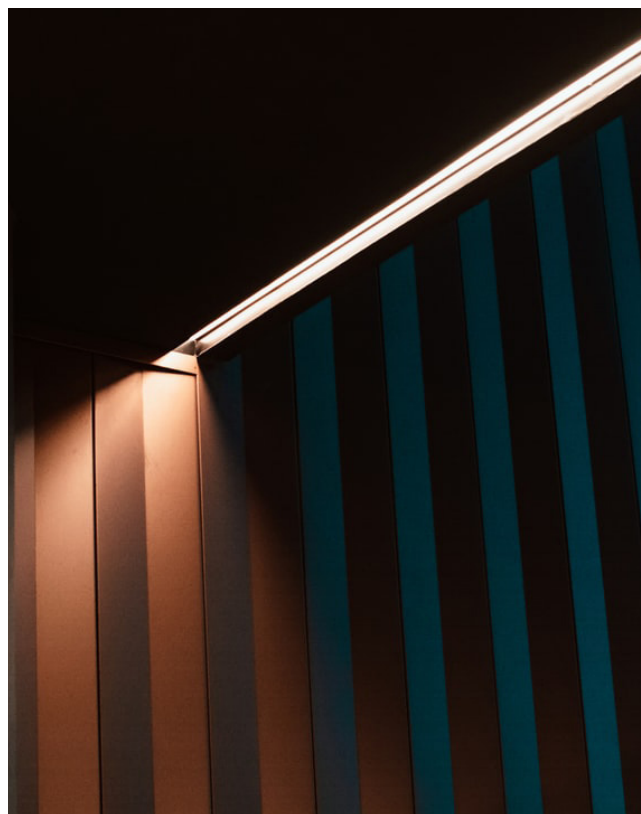

LXT 2010

Profile with PC Cover
Single-Side Flat Cover Type
Adhesive Tape Installation or Mount Clip Installation
For Shelves or Indirect Lighting



연색성 CRI
Ra 85 / 90 / 95

소비전력(최대) Watt/M(Max)
16 w/m

색온도 Color Temp.
2700K / 3000K / 3500K / 4000K / 5000K / 6000K



제작가능길이 Available length
50~3,000mm

발광각도 Beam Angle
120°


동작온도 Operating Temp.
-10°C to +45°C

마감 Housing
Anodized Aluminum

커버 Cover
Diffused PC



12V 25mm cut
16W/m Ra80+
120LED/m Dotless



12V 27.7mm cut
9W/m Ra80+
152LED/m Dotless



12V 25mm cut
12W/m Ra90+
480LED/m Dotless



24V 25mm cut
19.5W/m Ra90+
240LED/m Dotless



24V 25mm cut
13W/m Ra90+
120LED/m Dotless



Adhesive Tape



Mount Clip



External SMPS



ALL ABOUT LIGHTING.

W. www.luxart.kr T. 031 591 2700 E. sales@luxart.kr A. 195-17, Biryong-ro, Hwado-eup, Namyangju-si, Gyeonggi-do, Republic of Korea

LXT 2020

Profile with PC Cover
Single-Side Flat Cover Type
Adhesive Tape Installation or Mount Clip Installation
For Shelves or Indirect Lighting



연색성 CRI
Ra 85 / 90 / 95

소비전력(최대) Watt/M(Max)
16 w/m

색온도 Color Temp.
2700K / 3000K / 3500K / 4000K / 5000K / 6000K


제작가능길이 Available length
50~3,000mm

발광각도 Beam Angle
120°


동작온도 Operating Temp.
-10°C to +45°C

마감 Housing
Anodized Aluminum

커버 Cover
Diffused PC



12V 25mm cut
16W/m Ra 80+
120LED/m Dotless



12V 27.7mm cut
9W/m Ra80+
152LED/m Dotless




12V 8.33mm cut
10W/m Ra90+
120LED/m Dotless



24V 25mm cut
19.5W/m Ra90+
240LED/m Dotless



24V 25mm cut
13W/m Ra90+
120LED/m Dotless



24V 8.33mm cut
16W/m Ra90+
120LED/m Dotless



Adhesive Tape



Mount Clip



External SMPS



LXT 2310

Profile with PC Cover
Single-Side Flat Cover Type
Adhesive Tape Installation or Mount Clip Installation
For Shelves or Indirect Lighting



연색성 CRI
Ra 85 / 90 / 95

소비전력(최대) Watt/M(Max)
16 w/m

색온도 Color Temp.
2700K / 3000K / 3500K / 4000K / 5000K / 6000K


제작가능길이 Available length
50~3,000mm

발광각도 Beam Angle
120°


동작온도 Operating Temp.
-10°C to +45°C

마감 Housing
Anodized Aluminum

커버 Cover
Diffused PC



12V 25mm cut
16W/m Ra80+
120LED/m Dotless



12V 27.7mm cut
9W/m Ra80+
152LED/m Dotless



12V 25mm cut
12W/m Ra90+
480LED/m Dotless



24V 25mm cut
19.5W/m Ra90+
240LED/m Dotless



24V 25mm cut
13W/m Ra90+
120LED/m Dotless



Adhesive Tape



Mount Clip



External SMPS



LXT 3010

Profile with PC Cover
Single-Side Flat Cover Type
Adhesive Tape Installation or Mount Clip Installation
For Shelves or Indirect Lighting



연색성 CRI
Ra 85 / 90 / 95

소비전력(최대) Watt/M(Max)
16 w/m

색온도 Color Temp.
2700K / 3000K / 3500K / 4000K / 5000K / 6000K



제작가능길이 Available length
50~3,000mm

발광각도 Beam Angle
120°


동작온도 Operating Temp.
-10°C to +45°C

마감 Housing
Anodized Aluminum

커버 Cover
Diffused PC



12V 25mm cut
16W/m Ra80+
120LED/m



12V 27.7mm cut
9W/m Ra80+
152LED/m



12V 25mm cut
12W/m Ra90+
480LED/m Dotless



24V 25mm cut
19.5W/m Ra90+
240LED/m Dotless



24V 25mm cut
13W/m Ra90+
120LED/m



Adhesive Tape



Mount Clip



External SMPS



LXT 3020

Profile with PC Cover
Single-Side Flat Cover Type
Adhesive Tape Installation or Mount Clip Installation
For Shelves or Indirect Lighting



연색성 CRI
Ra 85 / 90 / 95

소비전력(최대) Watt/M(Max)
16 w/m

색온도 Color Temp.
2700K / 3000K / 3500K / 4000K / 5000K / 6000K



제작가능길이 Available length
50~3,000mm

발광각도 Beam Angle
120°


동작온도 Operating Temp.
-10°C to +45°C

마감 Housing
Anodized Aluminum

커버 Cover
Diffused PC



12V 25mm cut
16W/m Ra80+
120LED/m Dotless



12V 27.7mm cut
9W/m Ra80+
152LED/m Dotless



12V 25mm cut
12W/m Ra90+
480LED/m Dotless



24V 25mm cut
19.5W/m Ra90+
240LED/m Dotless



24V 25mm cut
13W/m Ra90+
120LED/m Dotless



Adhesive Tape



Mount Clip




External SMPS



ALL ABOUT LIGHTING.

W. www.luxart.kr T. 031 591 2700 E. sales@luxart.kr A. 195-17, Biryong-ro, Hwado-eup, Namyangju-si, Gyeonggi-do, Republic of Korea

LINEAR LIGHTING
ROUND SERIES



LXT 0910R
LXT 1108R
LXT 1309R
LXT 1113R
LXT 1721R
LXT 1408R
LXT 1915R
LXT 2000 Orb

LXT 0910R

Mini Profile with PC Cover
Dome Cover Type
Adhesive Tape Installation or Mount Clip Installation
For Shelves or Indirect Lighting



연색성 CRI
Ra 85 / 90 / 95

소비전력(최대) Watt/M(Max)
16 w/m

색온도 Color Temp.
2700K / 3000K / 3500K / 4000K / 5000K / 6000K



제작가능길이 Available length
50~3,000mm

발광각도 Beam Angle
120°


동작온도 Operating Temp.
-10°C to +45°C

마감 Housing
Anodized Aluminum

커버 Cover
Diffused PC



12V 25mm cut
16W/m Ra80+
120LED/m Dotless




12V 27.7mm cut
9W/m Ra80+
152LED/m Dotless



12V 12.5mm cut
10W/m Ra90+
240LED/m Dotless



12V 10mm cut
8W/m Ra90+
400LED/m Dotless



12V 8.33mm cut
10W/m Ra90+
120LED/m Dotless



Adhesive Tape



Mount Clip



External SMPS



LXT 1108R

Profile with PC Cover
Flat Round Cover Type
Adhesive Tape Installation or Mount Clip Installation
For Shelves or Indirect Lighting



연색성 CRI
Ra 85 / 90 / 95

소비전력(최대) Watt/M(Max)
16 w/m

색온도 Color Temp.
2700K / 3000K / 3500K / 4000K / 5000K / 6000K



제작가능길이 Available length
50~3,000mm

발광각도 Beam Angle
120°


동작온도 Operating Temp.
-10°C to +45°C

마감 Housing
Anodized Aluminum

커버 Cover
Diffused PC



12V 25mm cut
16W/m Ra80+
120LED/m




12V 27.7mm cut
9W/m Ra80+
152LED/m



12V 25mm cut
12W/m
480LED/m Dotless



12V 50mm cut
12W/m Ra80+
60LED/m



12V 8.33mm cut
10W/m
120LED/m



24V 25mm cut
13W/m Ra90+
120LED/m Dotless



Adhesive Tape



Mount Clip



External SMPS



ALL ABOUT LIGHTING.

W. www.luxart.kr T. 031 591 2700 E. sales@luxart.kr A. 195-17, Biryong-ro, Hwado-eup, Namyangju-si, Gyeonggi-do, Republic of Korea

LXT I309R

Profile with PC Cover
Flat Round Cover Type
Adhesive Tape Installation or Mount Clip Installation
For Shelves or Indirect Lighting



연색성 CRI
Ra 85 / 90 / 95

소비전력(최대) Watt/M(Max)
16 w/m

색온도 Color Temp.
2700K / 3000K / 3500K / 4000K / 5000K / 6000K



제작가능길이 Available length
50~3,000mm

발광각도 Beam Angle
120°


동작온도 Operating Temp.
-10°C to +45°C

마감 Housing
Anodized Aluminum

커버 Cover
Diffused PC



12V 25mm cut
16W/m Ra80+
120LED/m




12V 27.7mm cut
9W/m Ra80+
152LED/m Dotless



12V 25mm cut
12W/m Ra90+
480LED/m Dotless



12V 50mm cut
12W/m Ra80+
60LED/m



12V 8.33mm cut
10W/m Ra90+
120LED/m Dotless



24V 25mm cut
13W/m Ra90+
120LED/m Dotless



Adhesive Tape



Mount Clip



External SMPS



LXT III 3R

Profile with PC Cover
Dome Cover Type
Adhesive Tape Installation or Mount Clip Installation
For Shelves or Indirect Lighting



연색성 CRI
Ra 85 / 90 / 95

소비전력(최대) Watt/M(Max)
16 w/m

색온도 Color Temp.
2700K / 3000K / 3500K / 4000K / 5000K / 6000K



제작가능길이 Available length
50~3,000mm

발광각도 Beam Angle
120°


동작온도 Operating Temp.
-10°C to +45°C

마감 Housing
Anodized Aluminum


커버 Cover
Diffused PC




12V 25mm cut
16W/m Ra80+
120LED/m Dotless



12V 27.7mm cut
9W/m Ra80+
152LED/m Dotless



12V 8.33mm cut
10W/m Ra90+
60LED/m



24V 8.33mm cut
16W/m Ra90+
120LED/m Dotless



Adhesive Tape



Mount Clip




External SMPS



LXT 1721R

Profile with PC Cover
Dome Cover Type
Adhesive Tape Installation or Mount Clip Installation
For Shelves or Facade

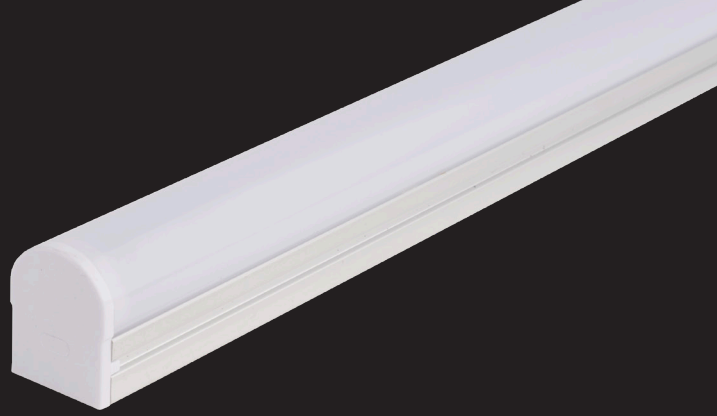

연색성 CRI
Ra 85 / 90 / 95

소비전력(최대) Watt/M(Max)
16 w/m

색온도 Color Temp.
2700K / 3000K / 3500K / 4000K / 5000K / 6000K



제작가능길이 Available length
50~3,000mm

발광각도 Beam Angle
120°


동작온도 Operating Temp.
-10°C to +45°C

마감 Housing
Anodized Aluminum

커버 Cover
Diffused PC



12V 25mm cut
16W/m Ra80+
120LED/m Dotless



12V 27.7mm cut
9W/m Ra80+
152LED/m Dotless



24V 25mm cut
19.5W/m Ra90+
240LED/m Dotless



24V 25mm cut
13W/m Ra90+
120LED/m Dotless



Adhesive Tape



Mount Clip




External SMPS



LXT I408R

Profile with PC Cover
Dome Cover Type
Adhesive Tape Installation
For Shelves or Facade

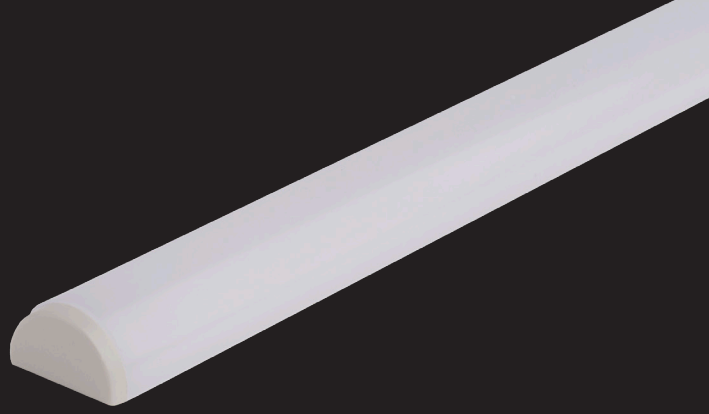

연색성 CRI
Ra 85 / 90 / 95

소비전력(최대) Watt/M(Max)
16 w/m

색온도 Color Temp.
2700K / 3000K / 3500K / 4000K / 5000K / 6000K



제작가능길이 Available length
50~2,000mm

발광각도 Beam Angle
120°


동작온도 Operating Temp.
-10°C to +45°C

마감 Housing
Anodized Aluminum

커버 Cover
Diffused PC



12V 25mm cut
16W/m Ra80+
120LED/m



12V 27.7mm cut
9W/m Ra80+
152LED/m



12V 25mm cut
12W/m Ra90+
480LED/m Dotless



24V 25mm cut
19.5W/m Ra90+
240LED/m Dotless



24V 25mm cut
13W/m Ra90+
120LED/m



Adhesive Tape



Magnetic



External SMPS



ALL ABOUT LIGHTING.

W. www.luxart.kr T. 031 591 2700 E. sales@luxart.kr A. 195-17, Biryong-ro, Hwado-eup, Namyangju-si, Gyeonggi-do, Republic of Korea

LXT 1915R

Profile with PC Cover
Dome Cover Type
Adhesive Tape Installation or Mount Clip Installation
For Shelves or Facade



연색성 CRI
Ra 85 / 90 / 95

소비전력(최대) Watt/M(Max)
16 w/m

색온도 Color Temp.
2700K / 3000K / 3500K / 4000K / 5000K / 6000K



제작가능길이 Available length
50~2,000mm

발광각도 Beam Angle
120°


동작온도 Operating Temp.
-10°C to +45°C

마감 Housing
Anodized Aluminum

커버 Cover
Diffused PC



12V 25mm cut
16W/m Ra80+
120LED/m Dotless



12V 27.7mm cut
9W/m Ra80+
152LED/m Dotless



12V 25mm cut
12W/m Ra90+
480LED/m Dotless



24V 25mm cut
19.5W/m Ra90+
240LED/m Dotless



24V 25mm cut
13W/m Ra90+
120LED/m Dotless




Adhesive Tape



Mount Clip



External SMPS

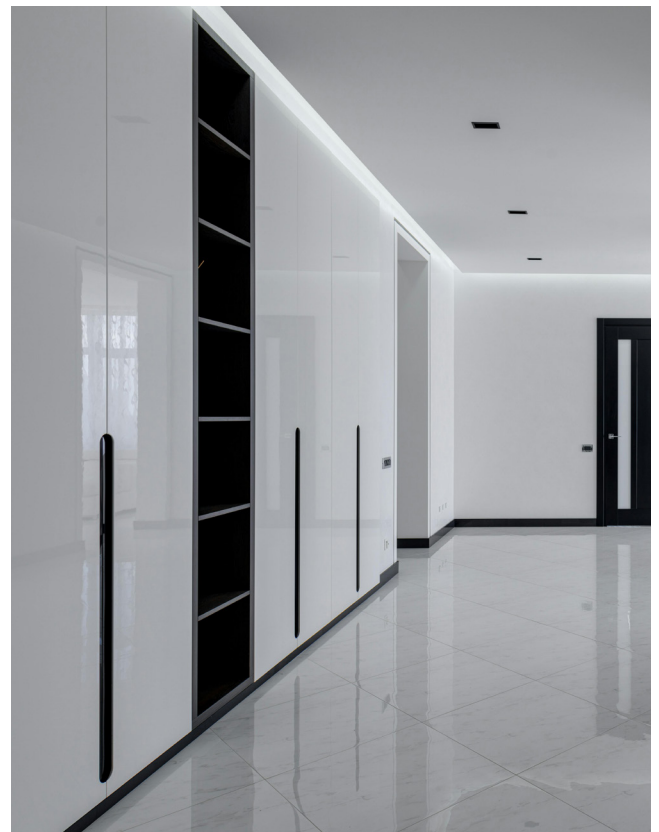

LXT 2000 Orb

Profile with PC Cover
Rounded Cover Type
Mount Clip Installation For Shelves or Facade
For Decorative Hanging Ceiling Lighting



연색성 CRI
Ra 85 / 90 / 95

소비전력(최대) Watt/M(Max)
16 w/m

색온도 Color Temp.
2700K / 3000K / 3500K / 4000K / 5000K / 6000K



제작가능길이 Available length
50~3,000mm

발광각도 Beam Angle
120°


동작온도 Operating Temp.
-10°C to +45°C

마감 Housing
Anodized Aluminum

커버 Cover
Diffused PC



12V 25mm cut
16W/m Ra80+
120LED/m Dotless



12V 27.7mm cut
9W/m Ra80+
152LED/m Dotless



12V 25mm cut
12W/m Ra90+
480LED/m Dotless



24V 25mm cut
19.5W/m Ra90+
240LED/m Dotless



24V 25mm cut
13W/m Ra90+
120LED/m Dotless



Adhesive Tape



Mount Clip




External SMPS



ALL ABOUT LIGHTING.

W. www.luxart.kr T. 031 591 2700 E. sales@luxart.kr A. 195-17, Biryong-ro, Hwado-eup, Namyangju-si, Gyeonggi-do, Republic of Korea

LINEAR LIGHTING
OPTIC SERIES



LXT 1312 Asym
LXT 1313 Asym
LXT 1212 Back-lit

LXT I3I2 Asym

Profile with PMMA Lens
Detachable Magnetic Installation
Adhesive Tape Installation
For Shelves



연색성 CRI
Ra 85 / 90 / 95

소비전력(최대) Watt/M(Max)
16 w/m

색온도 Color Temp.
2700K / 3000K / 3500K / 4000K / 5000K / 6000K



제작가능길이 Available length
50~2,000mm

발광각도 Beam Angle
Wide Asymmetric Beam (104° × 68°)


동작온도 Operating Temp.
-10°C to +45°C

마감 Housing
Anodized Aluminum


커버 Cover
PMMA




12V 25mm cut
16W/m Ra80+
120LED/m



12V 27.7mm cut
9W/m Ra80+
152LED/m




12V 8.33mm cut
10W/m Ra90+
120LED/m



24V 8.33mm cut
16W/m Ra90+
120LED/m



24V 25mm cut
13W/m Ra90+
120LED/m

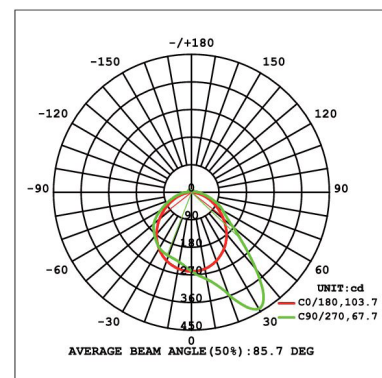

Adhesive Tape



Adhesive Tape



External SMPS

LXT 1313 Asym

Profile with PMMA Lens
Detachable Magnetic Installation
Detachable Magnetic Installation or Mount Clip Installation
For Shelves



연색성 CRI
Ra 85 / 90 / 95

소비전력(최대) Watt/M(Max)
16 w/m

색온도 Color Temp.
2700K / 3000K / 3500K / 4000K / 5000K / 6000K



제작가능길이 Available length
50~2,000mm

발광각도 Beam Angle
Narrow Asymmetric Beam (91° × 45°)


동작온도 Operating Temp.
-10°C to +45°C

마감 Housing
Anodized Aluminum


커버 Cover
PMMA




12V 25mm cut
16W/m Ra80+
120LED/m



12V 27.7mm cut
9W/m Ra80+
152LED/m





12V 8.33mm cut
10W/m Ra90+
120LED/m



24V 8.33mm cut
16W/m Ra90+
120LED/m



24V 25mm cut
13W/m Ra90+
120LED/m

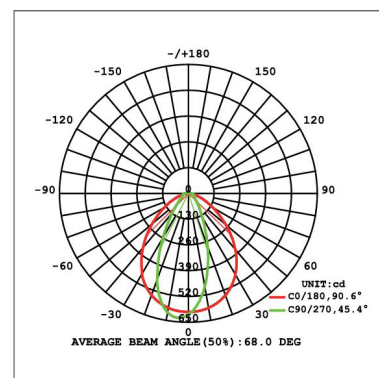

Adhesive Tape



Mount Clip



External SMPS

ALL ABOUT LIGHTING.

W. www.luxart.kr T. 031 591 2700 E. sales@luxart.kr A. 195-17, Biryong-ro, Hwado-eup, Namyangju-si, Gyeonggi-do, Republic of Korea

LXT 1212 Back-lit

PMMA Lens Lighting
with Diffused Lens for Back-Lit Applications
Adhesive Tape Installation or Mount Clip Installation



연색성 CRI
Ra 85+

소비전력(최대) Watt/M(Max)
12 w/m

색온도 Color Temp.
3000K / 4000K / 5000K / 5700K / 6500K



제작가능길이 Available length
100~3,000mm

발광각도 Beam Angle
165°


동작온도 Operating Temp.
-10°C to +45°C

마감 Housing
Anodized Aluminum

커버 Cover
Diffused PC

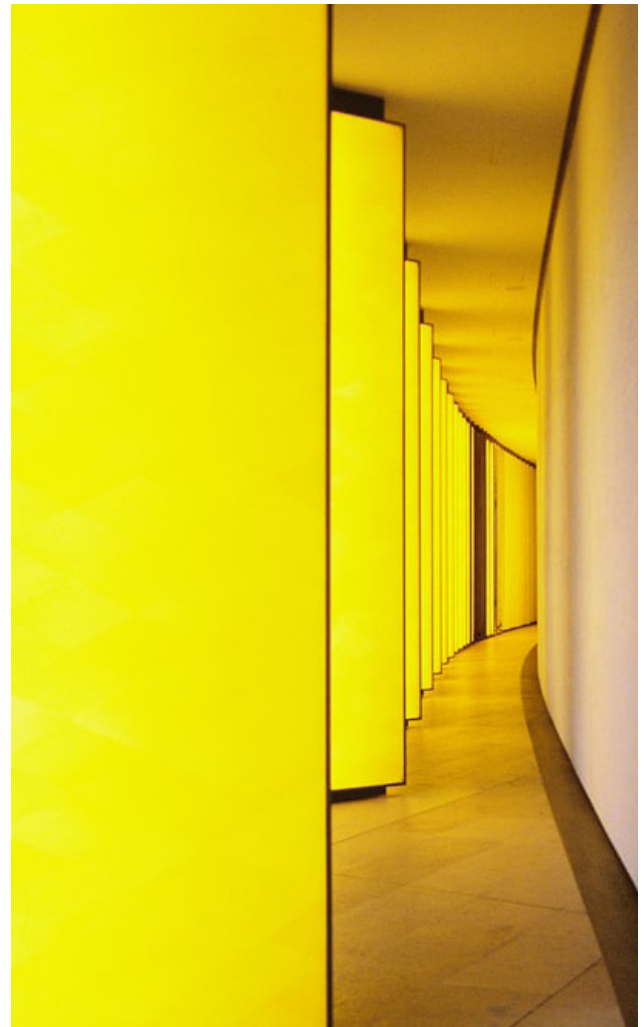

Adhesive Tape




Mount Clip



External SMPS

LINEAR LIGHTING
CORNER SERIES



LXT 0811C Magnetic

LXT 0808C

LXT 1010C

LXT 1111C

LXT 1313C

LXT 1412C Magnetic

LXT 1616C

LXT 0811C Magnetic

Corner Type Mini Profile with PC Cover
Single-Side Flat Cover Type
Detachable Magnetic Installation or Adhesive Tape Installation
For Shelves



연색성 CRI
Ra 80 / 90 / 95

소비전력(최대) Watt/M(Max)
16 w/m

색온도 Color Temp.
2700K / 3000K / 3500K / 4000K / 5000K / 6000K



제작가능길이 Available length
50~3,000mm

발광각도 Beam Angle
120°

동작온도 Operating Temp.
-10°C to +45°C

마감 Housing
Anodized Aluminum

커버 Cover
Diffused PC



12V 12.5mm cut
10W/m Ra90+
240LED/m Dotless



12V 10mm cut
8W/m Ra90+
400LED/m Dotless



24V 25mm cut
16W/m Ra90+
240LED/m Dotless



Magnetic



Adhesive Tape



External SMPS



LXT 0808C

Corner Type Mini Profile with PC Cover
Single-Side Rounded Cover Type
Adhesive Tape Installation or Mount Clip Installation
For Shelves



연색성 CRI
Ra 80 / 90 / 95

소비전력(최대) Watt/M(Max)
16 w/m

색온도 Color Temp.
2700K / 3000K / 3500K / 4000K / 5000K / 6000K


제작가능길이 Available length
50~3,000mm

발광각도 Beam Angle
120°


동작온도 Operating Temp.
-10°C to +45°C

마감 Housing
Anodized Aluminum

커버 Cover
Diffused PC



12V 12.5mm cut
10W/m Ra90+
240LED/m Dotless



12V 10mm cut
8W/m Ra90+
400LED/M Dotless



24V 25mm cut
16W/m Ra90+
240LED/m Dotless



Adhesive Tape



Mount Clip



External SMPS



ALL ABOUT LIGHTING.

W. www.luxart.kr T. 031 591 2700 E. sales@luxart.kr A. 195-17, Biryong-ro, Hwado-eup, Namyangju-si, Gyeonggi-do, Republic of Korea

LXT 1010C

Corner Type Profile with PC Cover
Single-Side Rounded Cover Type
Adhesive Tape Installation or Mount Clip Installation
For Shelves



연색성 CRI
Ra 80 / 90 / 95

소비전력(최대) Watt/M(Max)
16 w/m

색온도 Color Temp.
2700K / 3000K / 3500K / 4000K / 5000K / 6000K



제작가능길이 Available length
50~3,000mm

발광각도 Beam Angle
120°


동작온도 Operating Temp.
-10°C to +45°C

마감 Housing
Anodized Aluminum


커버 Cover
Diffused PC



12V 25mm cut
16W/m Ra80+
120LED/m



12V 27.7mm cut
9W/m Ra80+
152LED/m



12V 12.5mm cut
10W/m Ra90+
240LED/m Dotless



12V 10mm cut
8W/m Ra90+
400LED/m Dotless



12V 8.33mm cut
10W/m Ra90+
120LED/m



24V 25mm cut
16W/m Ra90+
240LED/m Dotless



Adhesive Tape



Mount Clip



External SMPS



LXT IIIIC

Corner Type Profile with PC Cover
Single-Side Rounded Cover Type
Adhesive Tape Installation or Mount Clip Installation
For Shelves



연색성 CRI
Ra 80 / 90 / 95

소비전력(최대) Watt/M(Max)
16 w/m

색온도 Color Temp.
2700K / 3000K / 3500K / 4000K / 5000K / 6000K



제작가능길이 Available length
50~3,000mm

발광각도 Beam Angle
120°


동작온도 Operating Temp.
-10°C to +45°C

마감 Housing
Anodized Aluminum

커버 Cover
Diffused PC



12V 25mm cut
16W/m Ra80+
120LED/m



12V 27.7mm cut
9W/m Ra80+
152LED/m



12V 12.5mm cut
10W/m Ra90+
240LED/m Dotless



12V 25mm cut
12W/m Ra90+
480LED/m Dotless



12V 8.33mm cut
10W/m Ra90+
120LED/m



24V 25mm cut
16W/m Ra90+
240LED/m Dotless



Adhesive Tape



Mount Clip



External SMPS



LXT I3I3C

Corner Type Profile with PC Cover
Single-Side Flat Cover Type
Adhesive Tape Installation
For Shelves



연색성 CRI
Ra 80 / 90 / 95

소비전력(최대) Watt/M(Max)
16 w/m

색온도 Color Temp.
2700K / 3000K / 3500K / 4000K / 5000K / 6000K



제작가능길이 Available length
50~3,000mm

발광각도 Beam Angle
120°


동작온도 Operating Temp.
-10°C to +45°C

마감 Housing
Anodized Aluminum


커버 Cover
Diffused PC



12V 25mm cut
16W/m Ra80+
120LED/m



12V 27.7mm cut
9W/m Ra80+
152LED/m



12V 12.5mm cut
10W/m Ra90+
240LED/m Dotless



12V 25mm cut
12W/m Ra90+
480LED/m Dotless



12V 8.33mm cut
10W/m Ra90+
120LED/m



24V 25mm cut
16W/m Ra90+
240LED/m Dotless



Magnetic



Adhesive Tape



External SMPS



LXT 1412C Magnetic

Corner Type Profile with PC Cover
Single-Side Flat Cover Type
Detachable Magnetic Installation
For Shelves



연색성 CRI
Ra 80 / 90 / 95

소비전력(최대) Watt/M(Max)
16 w/m

색온도 Color Temp.
2700K / 3000K / 3500K / 4000K / 5000K / 6000K



제작가능길이 Available length
50~3,000mm

발광각도 Beam Angle
120°


동작온도 Operating Temp.
-10°C to +45°C

마감 Housing
Anodized Aluminum

커버 Cover
Diffused PC



12V 25mm cut
16W/m Ra80+
120LED/m



12V 27.7mm cut
9W/m Ra80+
152LED/m



12V 12.5mm cut
10W/m Ra90+
240LED/m Dotless



12V 25mm cut
12W/m Ra90+
480LED/m Dotless



12V 8.33mm cut
10W/m Ra90+
120LED/m



24V 25mm cut
16W/m Ra90+
240LED/m Dotless



Magnetic



Adhesive Tape



External SMPS



LXT 1616C

Corner Type Profile with PC Cover
Single-Side Rounded Cover Type
Adhesive Tape Installation or Mount Clip Installation
For Shelves



연색성 CRI
Ra 80 / 90 / 95

소비전력(최대) Watt/M(Max)
16 w/m

색온도 Color Temp.
2700K / 3000K / 3500K / 4000K / 5000K / 6000K



제작가능길이 Available length
50~3,000mm

발광각도 Beam Angle
120°


동작온도 Operating Temp.
-10°C to +45°C

마감 Housing
Anodized Aluminum

커버 Cover
Diffused PC



12V 25mm cut
16W/m Ra80+
120LED/m Dotless



12V 27.7mm cut
9W/m Ra80+
152LED/m Dotless



12V 8.33mm cut
10W/m Ra90+
120LED/m Dotless



24V 25mm cut
19.5W/m Ra90+
240LED/m Dotless



24V 25mm cut
13W/m Ra90+
120LED/m Dotless



24V 8.33mm cut
16W/m Ra90+
120LED/m Dotless



Adhesive Tape



Mount Clip




External SMPS



LINEAR LIGHTING

LINEAR SERIES



LXT 2020 Glow

LXT 3020 Glow

LXT 3030 Glow

LXT 4030 Glow

LXT4040 Glow

LXT5035 Glow

LXT5050 Glow

LXT 4070 Glow

LXT 5070 Glow


LXT 6075 Glow

LXT 7090 Glow



LXT 2020 Glow

Profile with PC Cover
Single-Side Flat Cover Type
Adhesive Tape Installation or Mount Clip Installation
For

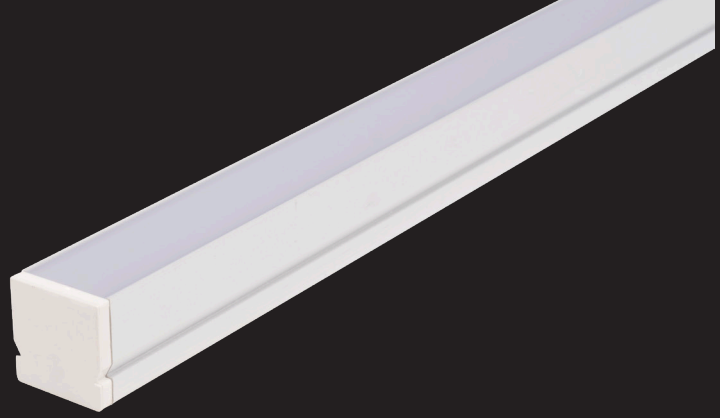

연색성 CRI
Ra 90

소비전력(최대) Watt/M(Max)
18 w/m

색온도 Color Temp.
2700K / 3000K / 3500K / 4000K / 5000K / 6500K



제작가능길이 Available length
50~3,000mm

발광각도 Beam Angle
120°

동작온도 Operating Temp.
-10°C to +45°C

마감 Housing
Anodized Aluminum

커버 Cover
Diffused PC



24V 50mm cut
18W/m Ra90+
280LED/m Dotless



24V 50mm cut
13W/m Ra90+
240LED/m Dotless




Adhesive Tape



Mount Clip




External SMPS

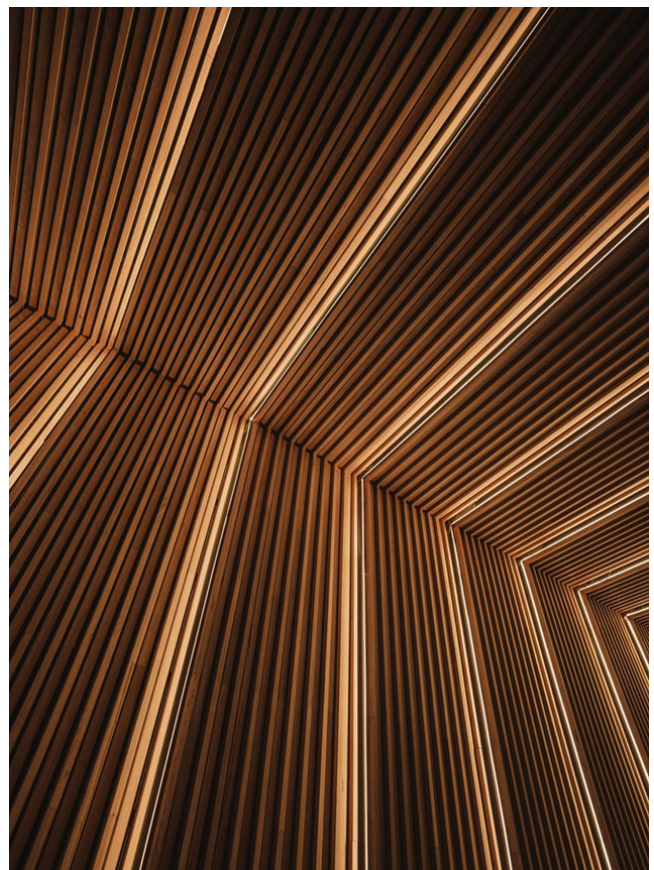

LXT 3020 Glow

Profile with PC Cover
Single-Side Flat Cover Type
Detachable Magnetic Installation or Mount Clip Installation
For Ceiling or Louver

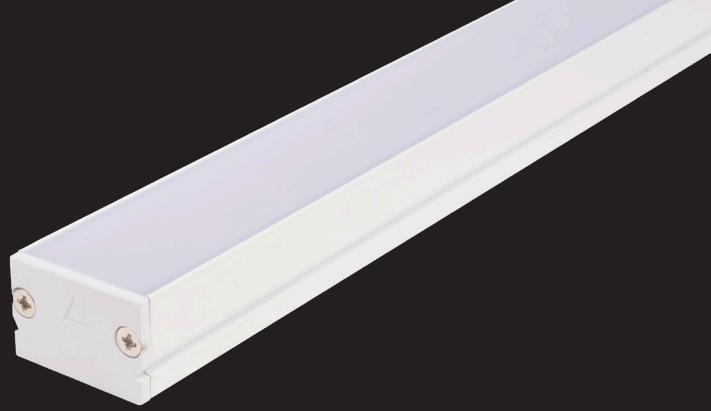

연색성 CRI
Ra 90

소비전력(최대) Watt/M(Max)
18 w/m

색온도 Color Temp.
2700K / 3000K / 3500K / 4000K / 5000K / 6500K


제작가능길이 Available length
50~3,000mm

발광각도 Beam Angle
120°

동작온도 Operating Temp.
-10°C to +45°C

마감 Housing
Anodized Aluminum


커버 Cover
Diffused PC



24V 50mm cut
18W/m Ra90+
280LED/m Dotless



24V 50mm cut
13W/m Ra90+
240LED/m Dotless

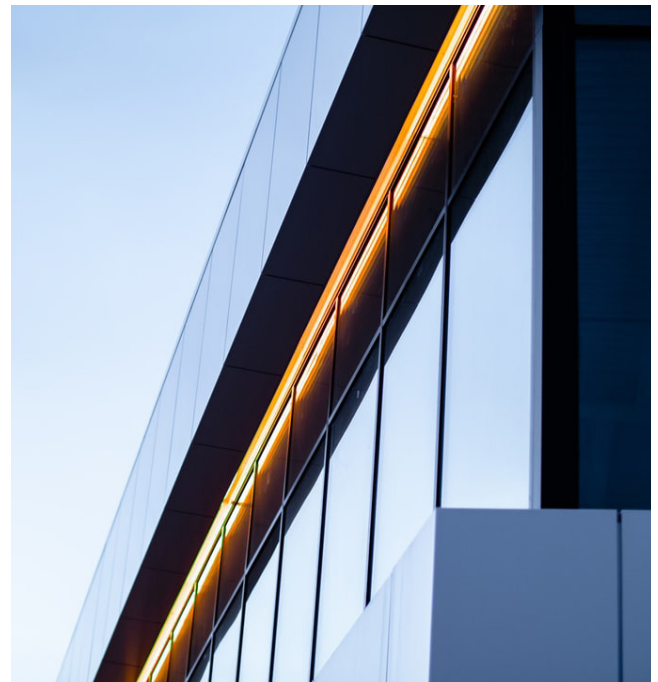

Magnetic



Mount Clip




External SMPS

ALL ABOUT LIGHTING.

W. www.luxart.kr T. 031 591 2700 E. sales@luxart.kr A. 195-17, Biryong-ro, Hwado-eup, Namyangju-si, Gyeonggi-do, Republic of Korea

LXT 3030 Glow

Profile with PC Cover
Single-Side Flat Cover Type
Screw-Fixed Surface-Mounted Type or Mount Clip Installation
For Ceiling or Louver

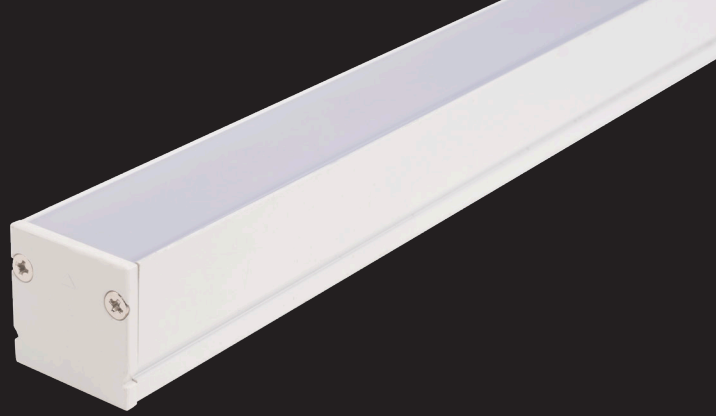

연색성 CRI
Ra 90

소비전력(최대) Watt/M(Max)
36 w/m

색온도 Color Temp.
2700K / 3000K / 3500K / 4000K / 5000K / 6500K



제작가능길이 Available length
50~3,000mm

발광각도 Beam Angle
120°

동작온도 Operating Temp.
-10°C to +45°C

마감 Housing
Anodized Aluminum

커버 Cover
Diffused PC



24V 50mm cut
18W/m*2line Ra90+
280LED/m Dotless



24V 50mm cut
13W/m*2line Ra90+
240LED/m Dotless




Adhesive Tape



Mount Clip



External SMPS

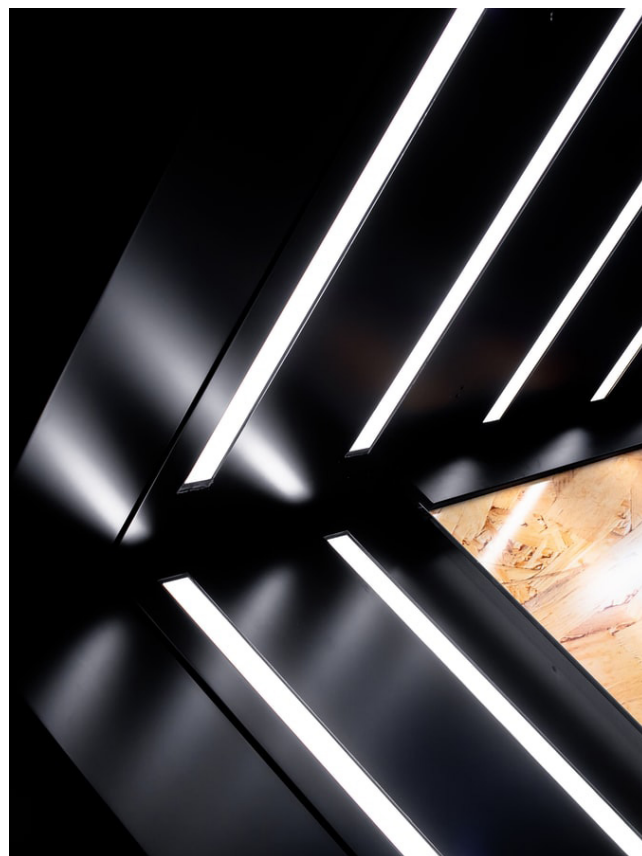

LXT 4030 Glow

Profile with PC Cover
Single-Side Flat Cover Type
Detachable Magnetic Installation or Mount Clip Installation
For Ceiling or Louver



연색성 CRI
Ra 90

소비전력(최대) Watt/M(Max)
36 w/m

색온도 Color Temp.
2700K / 3000K / 3500K / 4000K / 5000K / 6500K


제작가능길이 Available length
50~3,000mm

발광각도 Beam Angle
120°

동작온도 Operating Temp.
-10°C to +45°C

마감 Housing
Anodized Aluminum


커버 Cover
Diffused PC



24V 50mm cut
18W/m*2line Ra90+
280LED/m Dotless



24V 50mm cut
13W/m*2line Ra90+
240LED/m Dotless

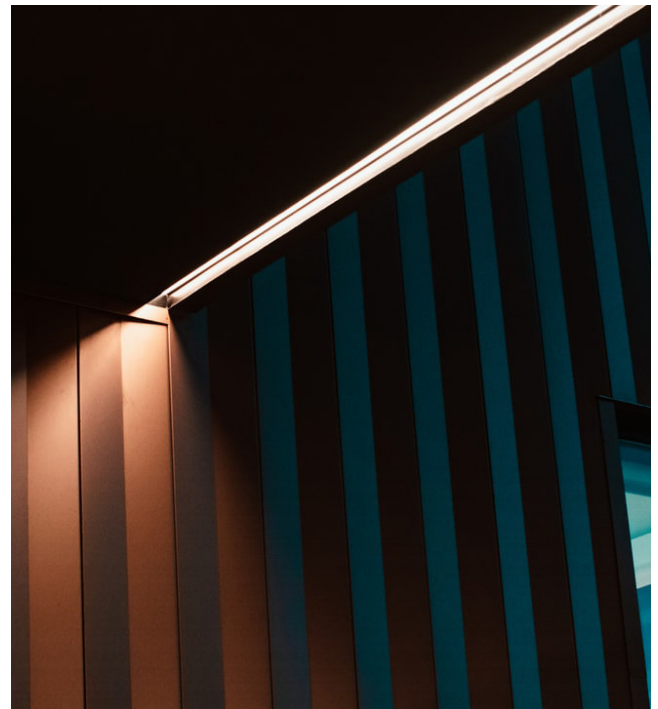

Magnetic



Mount Clip



External SMPS

ALL ABOUT LIGHTING.

W. www.luxart.kr T. 031 591 2700 E. sales@luxart.kr A. 195-17, Biryong-ro, Hwado-eup, Namyangju-si, Gyeonggi-do, Republic of Korea

LXT 4040 Glow

Profile with PC Cover
Single-Side Flat Cover Type
Detachable Magnetic Installation or Mount Clip Installation
For Ceiling or Louver



연색성 CRI
Ra 90

소비전력(최대) Watt/M(Max)
36 w/m

색온도 Color Temp.
2700K / 3000K / 3500K / 4000K / 5000K / 6500K



제작가능길이 Available length
50~3,000mm

발광각도 Beam Angle
120°

동작온도 Operating Temp.
-10°C to +45°C

마감 Housing
Anodized Aluminum

커버 Cover
Diffused PC



24V 50mm cut
18W/m*2line Ra90+
280LED/m Dotless



24V 50mm cut
13W/m*2line Ra90+
240LED/m Dotless




Magnetic



Mount Clip



External SMPS

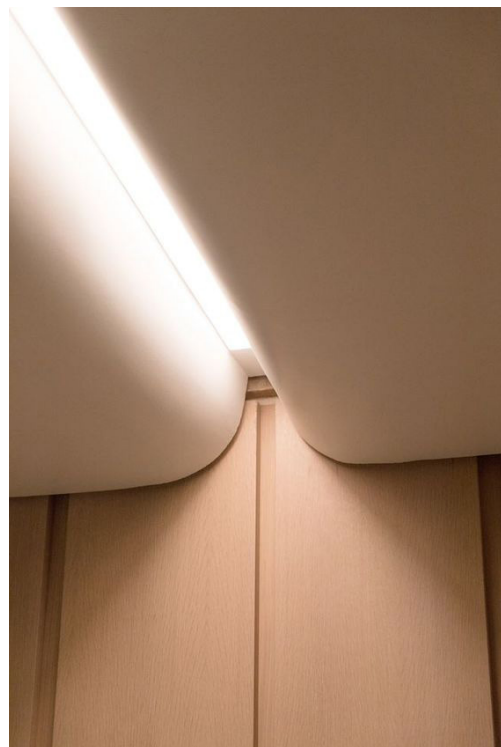

LXT 5035 Glow

Profile with PC Cover
Single-Side Flat Cover Type
Detachable Magnetic Installation or Mount Clip Installation
For Ceiling or Louver



연색성 CRI
Ra 90

소비전력(최대) Watt/M(Max)
36 w/m

색온도 Color Temp.
2700K / 3000K / 3500K / 4000K / 5000K / 6500K


제작가능길이 Available length
50~3,000mm

발광각도 Beam Angle
120°

동작온도 Operating Temp.
-10°C to +45°C

마감 Housing
Anodized Aluminum

커버 Cover
Diffused PC



24V 50mm cut
18W/m*2line Ra90+
280LED/m Dotless



24V 50mm cut
13W/m*2line Ra90+
240LED/m Dotless




Magnetic



Mount Clip



External SMPS

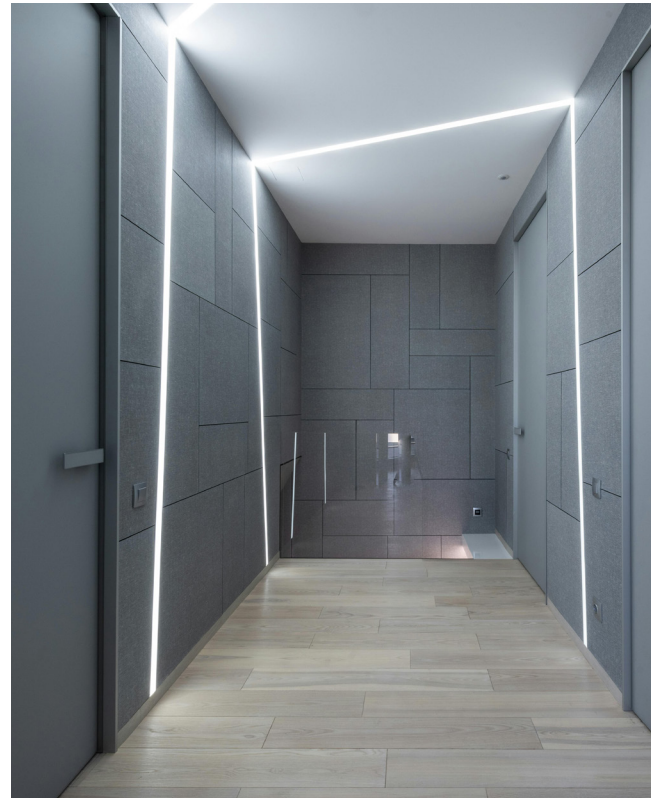

LXT 5050 Glow

Profile with PC Cover
Single-Side Flat Cover Type
Clip-Based Hanging Installation or Wire Suspension Installation
For Ceiling



연색성 CRI
Ra 90

소비전력(최대) Watt/M(Max)
36 w/m

색온도 Color Temp.
2700K / 3000K / 3500K / 4000K / 5000K / 6500K



제작가능길이 Available length
50~3,000mm

발광각도 Beam Angle
120°

동작온도 Operating Temp.
-10°C to +45°C

마감 Housing
Anodized Aluminum

커버 Cover
Diffused PC



24V 50mm cut
18W/m*2line Ra90+
280LED/m Dotless



24V 50mm cut
13W/m*2line Ra90+
240LED/m Dotless




Magnetic



Mount Clip



External SMPS

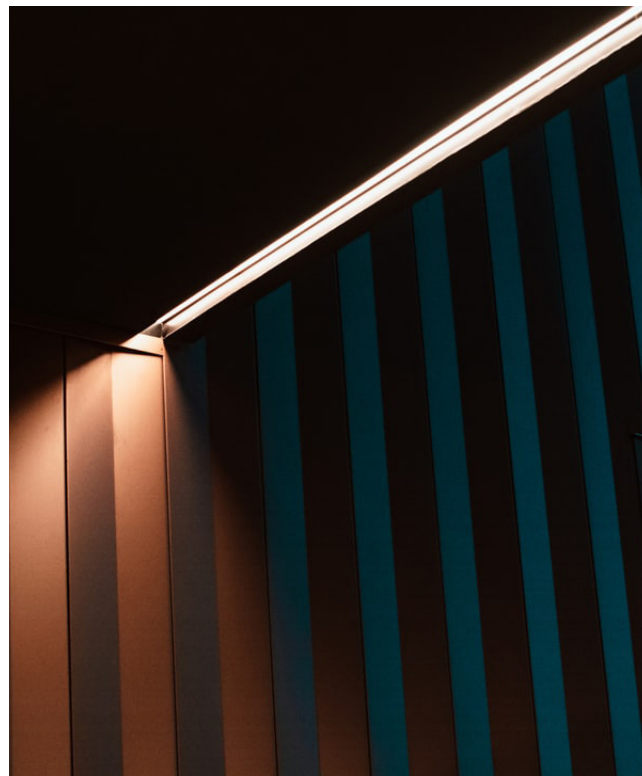

LXT 4070 Glow

Profile with PC Cover
Single-Side Flat Cover Type
Clip-Based Hanging Installation or Wire Suspension Installation
For Ceiling



연색성 CRI
Ra 90

소비전력(최대) Watt/M(Max)
36 w/m

색온도 Color Temp.
2700K / 3000K / 3500K / 4000K / 5000K / 6500K


제작가능길이 Available length
50~3,000mm

발광각도 Beam Angle
120°

동작온도 Operating Temp.
-10°C to +45°C

마감 Housing
Anodized Aluminum


커버 Cover
Diffused PC

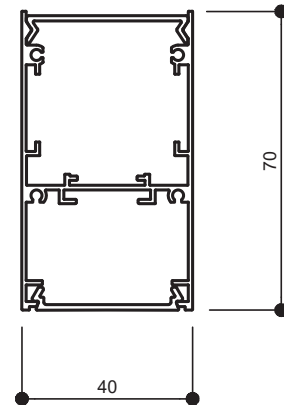

24V 50mm cut
18W/m*2line Ra90+
280LED/m Dotless



24V 50mm cut
13W/m*2line Ra90+
240LED/m Dotless



wire-suspended



pipe-suspended



External SMPS



ALL ABOUT LIGHTING.

W. www.luxart.kr T. 031 591 2700 E. sales@luxart.kr A. 195-17, Biryong-ro, Hwado-eup, Namyangju-si, Gyeonggi-do, Republic of Korea

LXT 5070 Glow

Profile with PC Cover
Single-Side Flat Cover Type
Clip-Based Hanging Installation or Wire Suspension Installation
For Ceiling



연색성 CRI
Ra 90

소비전력(최대) Watt/M(Max)
36 w/m

색온도 Color Temp.
2700K / 3000K / 3500K / 4000K / 5000K / 6500K



제작가능길이 Available length
50~3,000mm

발광각도 Beam Angle
120°

동작온도 Operating Temp.
-10°C to +45°C

마감 Housing
Anodized Aluminum


커버 Cover
Diffused PC

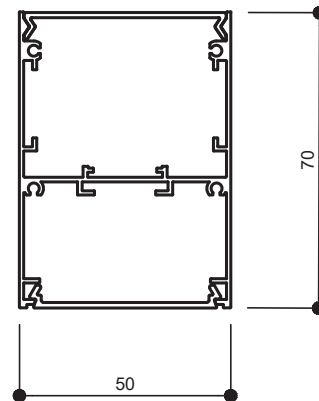

24V 50mm cut
18W/m*2line Ra90+
280LED/m Dotless



24V 50mm cut
13W/m*2line Ra90+
240LED/m Dotless




wire-suspended



pipe-suspended



External SMPS

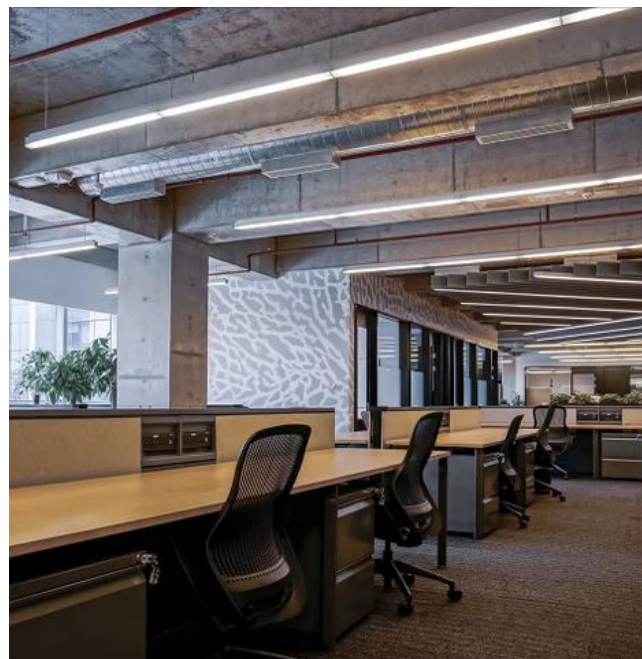

LXT 6075 Glow

Profile with PC Cover
Single-Side Flat Cover Type
Clip-Based Hanging Installation or Wire Suspension Installation
For Ceiling



연색성 CRI
Ra 90

소비전력(최대) Watt/M(Max)
36 w/m

색온도 Color Temp.
2700K / 3000K / 3500K / 4000K / 5000K / 6500K


제작가능길이 Available length
50~3,000mm

발광각도 Beam Angle
120°

동작온도 Operating Temp.
-10°C to +45°C

마감 Housing
Anodized Aluminum


커버 Cover
Diffused PC

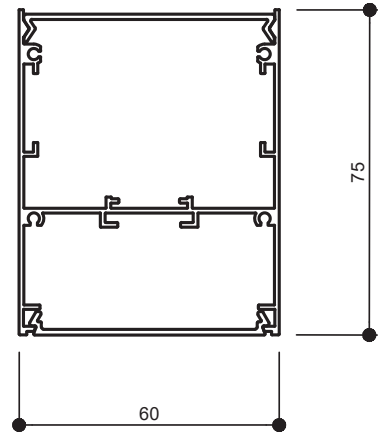

24V 50mm cut
18W/m*2line Ra90+
280LED/m Dotless



24V 50mm cut
13W/m*2line Ra90+
240LED/m Dotless



wire-suspended



pipe-suspended



External SMPS



ALL ABOUT LIGHTING.

W. www.luxart.kr T. 031 591 2700 E. sales@luxart.kr A. 195-17, Biryong-ro, Hwado-eup, Namyangju-si, Gyeonggi-do, Republic of Korea

LXT 7090 Glow

Profile with PC Cover
Single-Side Flat Cover Type
Clip-Based Hanging Installation or Wire Suspension Installation
For Ceiling



연색성 CRI
Ra 90

소비전력(최대) Watt/M(Max)
36 w/m

색온도 Color Temp.
2700K / 3000K / 3500K / 4000K / 5000K / 6500K


제작가능길이 Available length
50~3,000mm

발광각도 Beam Angle
120°

동작온도 Operating Temp.
-10°C to +45°C

마감 Housing
Anodized Aluminum


커버 Cover
Diffused PC

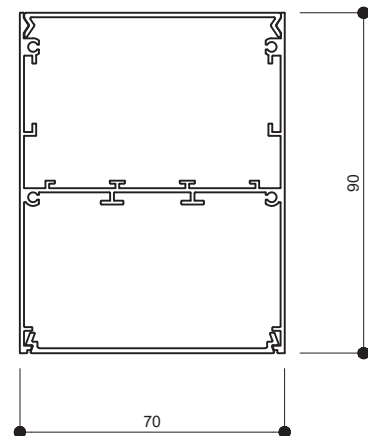

24V 50mm cut
18W/m*2line Ra90+
280LED/m Dotless



24V 50mm cut
13W/m*2line Ra90+
240LED/m Dotless




wire-suspended



pipe-suspended



External SMPS

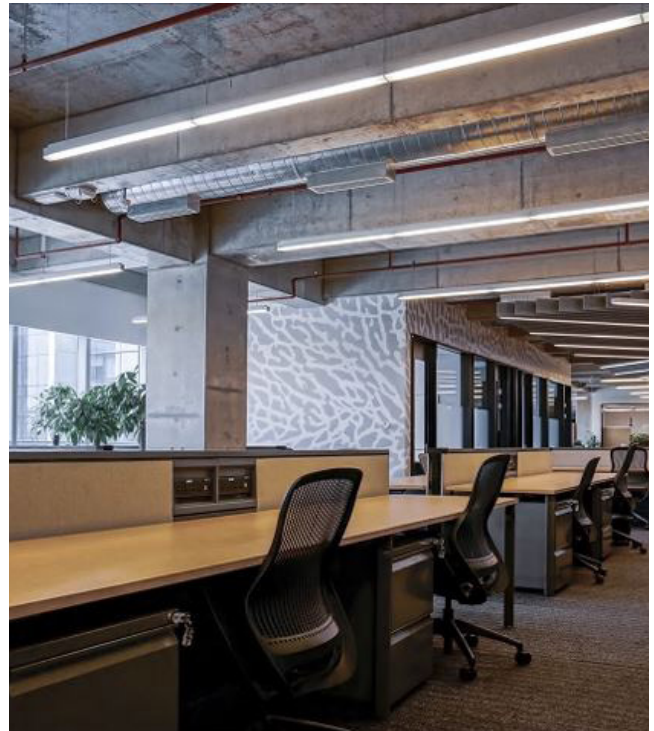

LINEAR LIGHTING

NEON SERIES



LXT 0408S FLEX
LXT 0606T FLEX
LXT 0808T FLEX
LXT 1010S FLEX
LXT 1010T FLEX
LXT 1212S FLEX
LXT 1212T FLEX
LXT 1616C FLEX
LXT 1616 3D FLEX

LXT 0408S FLEX

Slim Side-Flexible Type with Side-Bendable Design
Mount Clip Installation
for curved surfaces and indirect lighting

연색성 CRI
Ra 80 / 90 / 95

소비전력(최대) Watt/M(Max)
9.6 w/m

색온도 Color Temp.
2700K / 3000K / 3500K / 4000K / 5000K / 6000K


제작가능길이 Available length
3,000mm

발광각도 Beam Angle
120°

동작온도 Operating Temp.
-10°C to +45°C

마감 Housing
Anodized Aluminum

커팅 Cutting unit
Free cut



Mount clip



External SMPS



LXT 0606T FLEX

Mini Top-Bend Flexible Lighting Design
for Vertical Bending Applications
Mount Clip Installation
for curved surfaces and indirect lighting

연색성 CRI

Ra 80 / 90 / 95

소비전력(최대) Watt/M(Max)

9.6 w/m

색온도 Color Temp.

2700K / 3000K / 3500K / 4000K / 5000K / 6000K

제작가능길이 Available length

3,000mm

발광각도 Beam Angle

120°

동작온도 Operating Temp.


-10°C to +45°C

마감 Housing

Anodized Aluminum

커팅 Cutting unit

Free cut



Mount clip



External SMPS



LXT 0808T FLEX

Top-Bend 3-Sided Emitting Flexible Lighting
Optimized for Vertical Bending Applications
Mount Clip Installation
for curved surfaces and indirect lighting

연색성 CRI
Ra 80 / 90 / 95

소비전력(최대) Watt/M(Max)
9.6 w/m

색온도 Color Temp.
2700K / 3000K / 3500K / 4000K / 5000K / 6000K


제작가능길이 Available length
3,000mm

발광각도 Beam Angle
120°

동작온도 Operating Temp.
-10°C to +45°C

마감 Housing
Anodized Aluminum


커팅 Cutting unit
Free cut

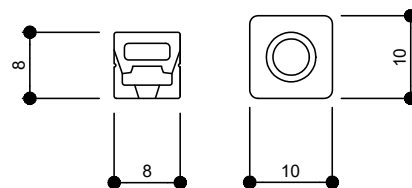

Mount clip



External SMPS

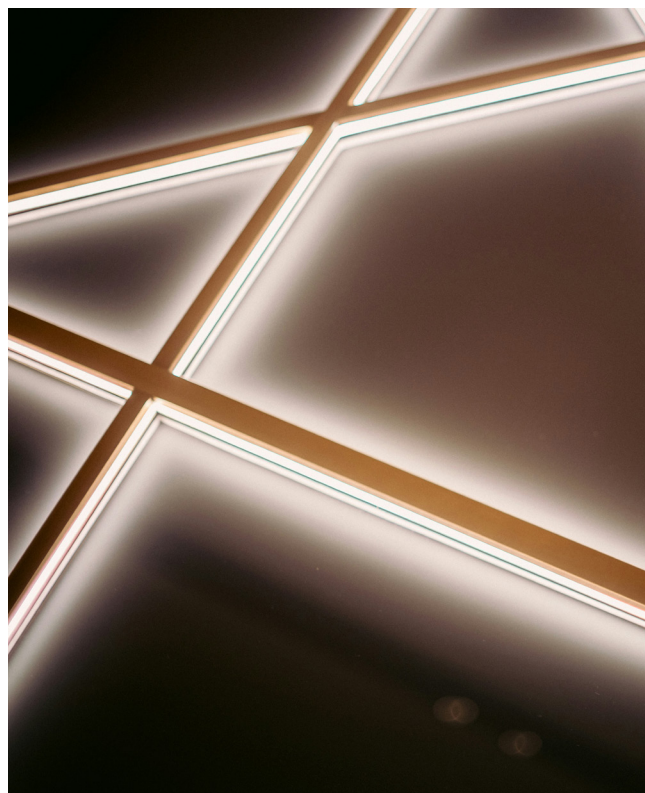

LXT 1010S FLEX

Side-Bend Flexible Lighting Design
Optimized for Side Bending Applications
Mount Clip Installation
for Curved Surfaces and Indirect Lighting

연색성 CRI
Ra 80 / 90 / 95

소비전력(최대) Watt/M(Max)
10 w/m

색온도 Color Temp.
2700K / 3000K / 3500K / 4000K / 5000K / 6000K


제작가능길이 Available length
5,000mm

발광각도 Beam Angle
120°

동작온도 Operating Temp.
-25°C to +60°C

마감 Housing
Anodized Aluminum

커팅 Cutting unit
8.33mm

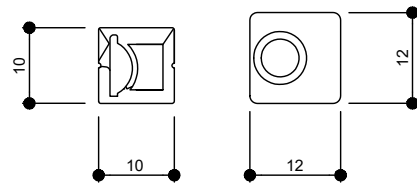

Mount clip



External SMPS



LXT 1010T FLEX

Top-Bend Flexible Lighting Design
Optimized for Vertical Bending Applications
Mount Clip Installation
for curved surfaces and indirect lighting

연색성 CRI

Ra 80 / 90 / 95

소비전력(최대) Watt/M(Max)

10 w/m

색온도 Color Temp.

2700K / 3000K / 3500K / 4000K / 5000K / 6000K

제작가능길이 Available length

5,000mm

발광각도 Beam Angle

120°

동작온도 Operating Temp.


-25°C to +60°C

마감 Housing

Anodized Aluminum

커팅 Cutting unit

8.33mm

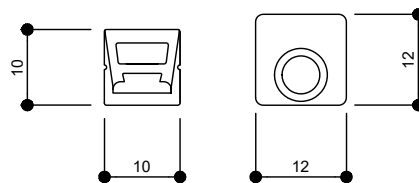

Mount clip



External SMPS

LXT 1212S FLEX

Side-Bend Flexible Lighting Design
Optimized for Side Bending Applications
Mount Clip Installation
Ideal for Curved Surfaces and Indirect Lighting

연색성 CRI
Ra 80 / 90 / 95

소비전력(최대) Watt/M(Max)
10 w/m

색온도 Color Temp.
2700K / 3000K / 3500K / 4000K / 5000K / 6000K


제작가능길이 Available length
5,000mm

발광각도 Beam Angle
120°

동작온도 Operating Temp.
-25°C to +60°C

마감 Housing
Anodized Aluminum

커팅 Cutting unit
8.33mm

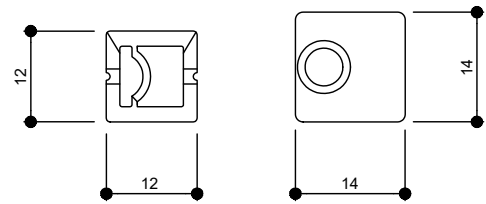

Mount clip



External SMPS



LXT 1212T FLEX

Top-Bend Flexible Lighting Design
for Vertical Bending Applications
Mount Clip Installation
for curved surfaces and indirect lighting

연색성 CRI
Ra 80 / 90

소비전력(최대) Watt/M(Max)
10 w/m

색온도 Color Temp.
2700K / 3000K / 3500K / 4000K / 5000K / 6000K


제작가능길이 Available length
50~3,000mm

발광각도 Beam Angle
120°

동작온도 Operating Temp.
-25°C to +60°C

마감 Housing
Anodized Aluminum

커팅 Cutting unit
8.33mm

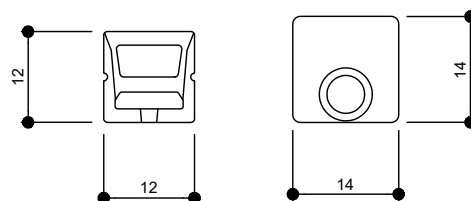

Mount clip



External SMPS



LXT 1616C FLEX

Top-Bend Flexible Lighting Design
for Vertical Bending Applications
Mount Clip Installation
for curved surfaces and indirect lighting

연색성 CRI
Ra 80 / 90

소비전력(최대) Watt/M(Max)
13 w/m

색온도 Color Temp.
2700K / 3000K / 3500K / 4000K / 5000K / 6000K


제작가능길이 Available length
50~3,000mm

발광각도 Beam Angle
120°

동작온도 Operating Temp.
-25°C to +60°C

마감 Housing
Anodized Aluminum

커팅 Cutting unit
41.5mm



Mount clip



External SMPS



ALL ABOUT LIGHTING.

W. www.luxart.kr T. 031 591 2700 E. sales@luxart.kr A. 195-17, Biryong-ro, Hwado-eup, Namyangju-si, Gyeonggi-do, Republic of Korea

LXT 1616 3D FLEX

3D Multi-Bend Flexible Lighting Design
for Multi-Directional Bending Applications
Mount Clip Installation
for curved surfaces and indirect lighting

연색성 CRI
Ra 80 / 90

소비전력(최대) Watt/M(Max)
13 w/m

색온도 Color Temp.
2700K / 3000K / 3500K / 4000K / 5000K / 6000K



제작가능길이 Available length
50~3,000mm

발광각도 Beam Angle
120°

동작온도 Operating Temp.
-25°C to +60°C

마감 Housing
Anodized Aluminum

커팅 Cutting unit
50mm

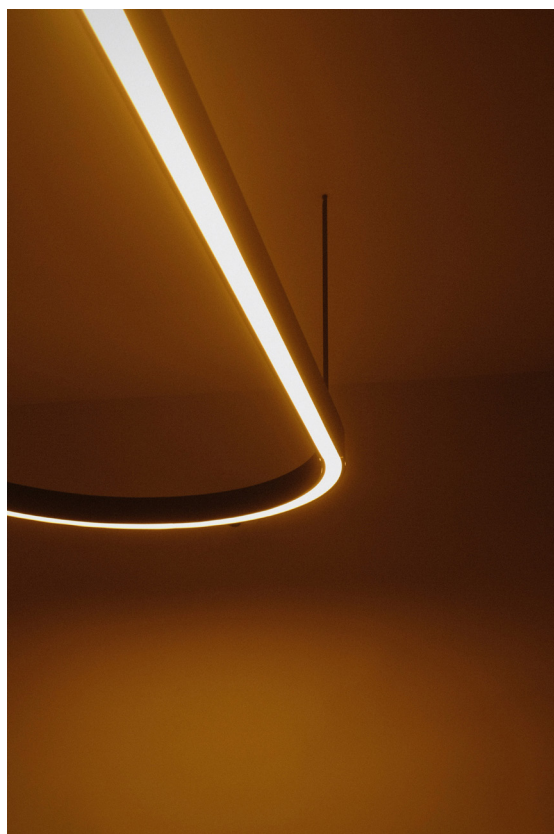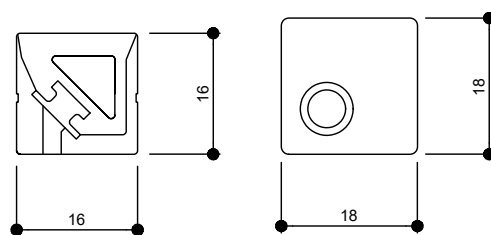

Mount clip



External SMPS

LXT 1515D FLEX

Rounded Top-Bend Flexible Lighting Design
Single-Side Flat Cover Type
Adhesive Tape Installation or Mount Clip Installation

연색성 CRI
Ra 80 / 90

소비전력(최대) Watt/M(Max)
13 w/m

색온도 Color Temp.
2700K / 3000K / 3500K / 4000K / 5000K / 6000K


제작가능길이 Available length
5,000mm

발광각도 Beam Angle
120°

동작온도 Operating Temp.
-25°C to +60°C

마감 Housing
Anodized Aluminum

커팅 Cutting unit
50mm

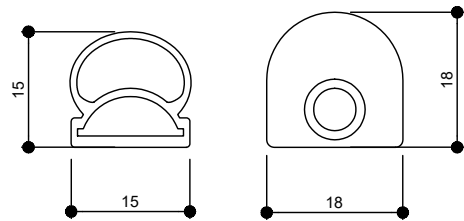


Mount clip



External SMPS

ETC



Converter With CASE

Fabric Panel

Snap Frame Panel

Light Guide Panel

Converter With CASE

정격 출력 전압 Output Rated Voltage
12V / 24V

정격 출력 전류 Output Rated Current
22.5A

효율 Efficiency
Min 91%

역률 Power Factor
PF>0.95

입력 전압 Input Voltage Range
187~264Vac (50~60Hz) at 85% rated power


정격 입력 전류 Input Rated Current
1.5A (220Vac 60Hz)

동작 온도 Operating Temperature
-30~50°C

보관 온도 Storage Temperature
60°C



Specification-Compliant SMPS Case (200 × 300 × 80)

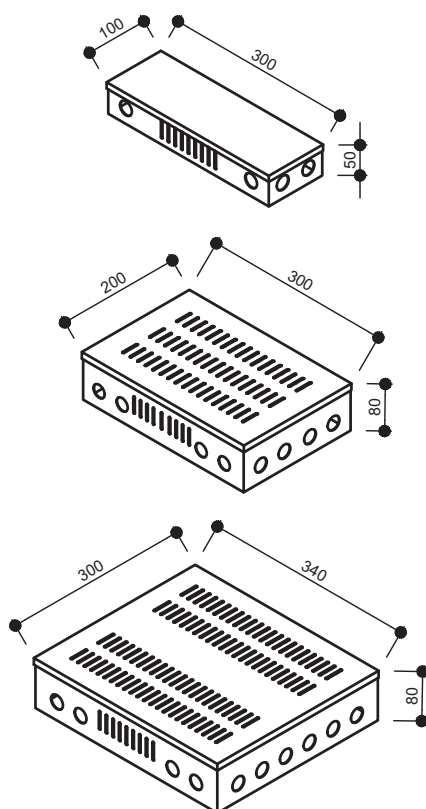

Specification-Compliant SMPS Case (300 × 340 × 80)

Fabric Panel

연색성 CRI

Ra 80 / 90 / 95

소비전력(최대) Watt/M(Max)

16 w/m

색온도 Color Temp.

2700K / 3000K / 3500K / 4000K / 5000K / 5700K / 6500K

제작가능길이 Available length

Edge-lit type 1,210 x 2,450 / Direct-lit type 4,800 x 30,000

발광각도 Beam Angle

120°

동작온도 Operating Temp.


-10°C to +45°C

마감 Housing

Anodized Aluminum

커버 Cover

Diffused PC



24V 50mm cut
12W/M
60LED/M





12V 80mm cut
14W/M
12LED/M





External SMPS

With Only LGP

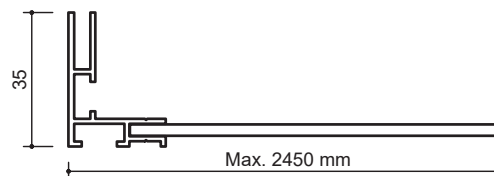

With Only LXT 1909 Back-lit

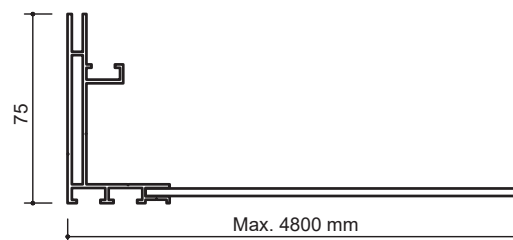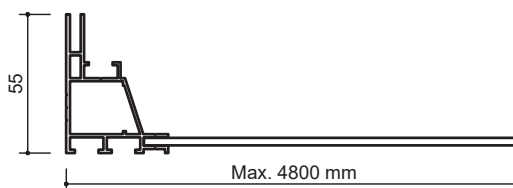

ALL ABOUT LIGHTING.

W. www.luxart.kr T. 031 591 2700 E. sales@luxart.kr A. 195-17, Biryong-ro, Hwado-eup, Namyangju-si, Gyeonggi-do, Republic of Korea

Snap Frame Panel

연색성 CRI
Ra 85 / 90

소비전력(최대) Watt/M(Max)
16 w/m


색온도 Color Temp.
2700K / 3000K / 3500K / 4000K / 5000K / 5700K / 6500K

제작가능길이 Available length
1,210mm x 2,450mm

동작온도 Operating Temp.
-10°C to +45°C

마감 Housing
Anodized Aluminum

커버 Cover
Diffused PC

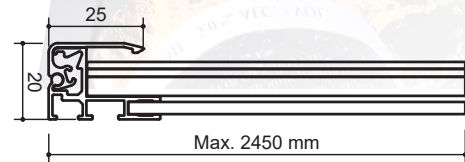

External SMPS



Light Guide Plate

연색성 CRI
Ra 85 / 90

소비전력(최대) Watt/M(Max)
16 w/m




색온도 Color Temp.
2700K / 3000K / 3500K / 4000K / 5000K / 5700K / 6500K

제작가능길이 Available length
1,210mm x 2,450mm

동작온도 Operating Temp.
-10°C to +45°C

마감 Housing
Anodized Aluminum

커버 Cover
Diffused PC

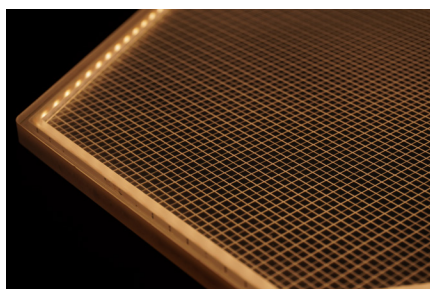


Light Guide Panel with LED Strip



External SMPS



SHOWCASE SPOT



LXT 14 Mini D/L
LXT 1527 Mini Spot
LXT 1623 Mini Spot
LXT 1442 Tower
LXT 08105 Tower
LXT 1860 Tower
LXT 0861 Tower
LXT 2440 Tower

LXT I 4 Mini D/L

Mini Spot Light for Jewelry Showcase

연색성 CRI

Ra 90

출력 Output Power

1W (12V / 24V)

색온도 Color Temp.

2,700K / 3,000K / 4,000K / 5,000K / 6,000K

사이즈 Size

Ø85 x H115 (cut out 75Ø)

발광각도 Beam Angle


36°

마감 Material

Aluminum

마감컬러 Finish Color

White, Black



LXT I 527 Mini Spot

Mini Spot Light for Jewelry Showcase

연색성 CRI

Ra 90

출력 Output Power

1W (12V / 24V)

색온도 Color Temp.

2,700K / 3,000K / 4,000K / 5,000K / 6,000K

사이즈 Size

Ø85 x H115 (cut out 75Ø)

발광각도 Beam Angle


36°

마감 Material

Aluminum

마감컬러 Finish Color

White, Black

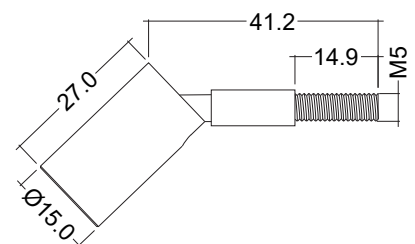

LXT I 623 Mini Spot

Mini Spot Light for Jewelry Showcase

연색성 CRI

Ra 90

출력 Output Power

1W (12V / 24V)

색온도 Color Temp.

2,700K / 3,000K / 4,000K / 5,000K / 6,000K

사이즈 Size

Ø85 x H115 (cut out 75Ø)

발광각도 Beam Angle


36°

마감 Material

Aluminum

마감컬러 Finish Color

White, Black



LXT I 442 Tower

Tower Spot Light for Jewelry Showcase

연색성 CRI

Ra 90

출력 Output Power

1W (12V / 24V)

색온도 Color Temp.

2,700K / 3,000K / 4,000K / 5,000K / 6,000K

사이즈 Size

Ø85 x H115 (cut out 75Ø)

발광각도 Beam Angle


36°

마감 Material

Aluminum

마감컬러 Finish Color

White, Black

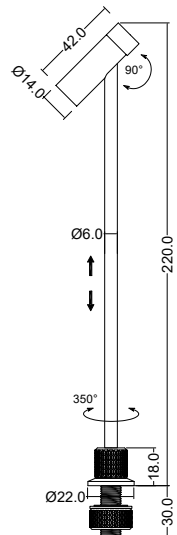

ALL ABOUT LIGHTING.

W. www.luxart.kr T. 031 591 2700 E. sales@luxart.kr A. 195-17, Biryong-ro, Hwado-eup, Namyangju-si, Gyeonggi-do, Republic of Korea

LXT 08105 Tower

Tower Spot Light for Jewelry Showcase

연색성 CRI

Ra 90

출력 Output Power

1W (12V / 24V)

색온도 Color Temp.

2,700K / 3,000K / 4,000K / 5,000K / 6,000K

사이즈 Size

Ø85 x H115 (cut out 75Ø)

발광각도 Beam Angle


36°

마감 Material

Aluminum

마감컬러 Finish Color

White, Black

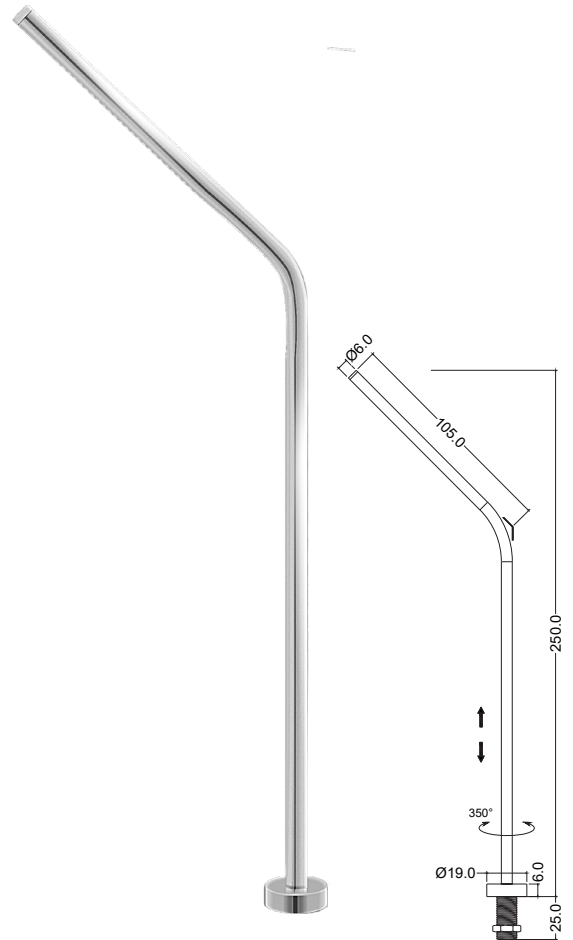

LXT 1860 Tower

Tower Spot Light for Jewelry Showcase

연색성 CRI

Ra 90

출력 Output Power

1W (12V / 24V)

색온도 Color Temp.

2,700K / 3,000K / 4,000K / 5,000K / 6,000K

사이즈 Size

Ø85 x H115 (cut out 75Ø)

발광각도 Beam Angle


36°

마감 Material

Aluminum

마감컬러 Finish Color

White, Black

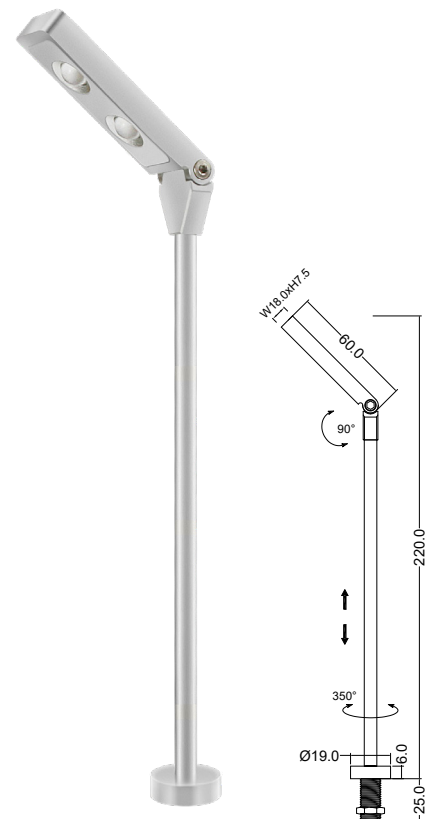

LXT 086 I Tower

Tower Spot Light for Jewelry Showcase

연색성 CRI

Ra 90

출력 Output Power

1W (12V / 24V)

색온도 Color Temp.

2,700K / 3,000K / 4,000K / 5,000K / 6,000K

사이즈 Size

Ø85 x H115 (cut out 75Ø)

발광각도 Beam Angle


36°

마감 Material

Aluminum

마감컬러 Finish Color

White, Black

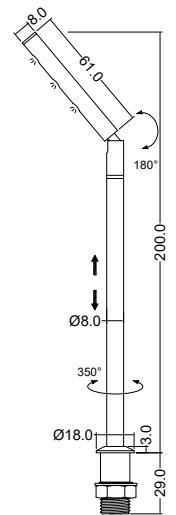

LXT 2440 Tower

Tower Spot Light for Jewelry Showcase

연색성 CRI

Ra 90

출력 Output Power

1W (12V / 24V)

색온도 Color Temp.

2,700K / 3,000K / 4,000K / 5,000K / 6,000K

사이즈 Size

Ø85 x H115 (cut out 75Ø)

발광각도 Beam Angle


36°

마감 Material

Aluminum

마감컬러 Finish Color

White, Black

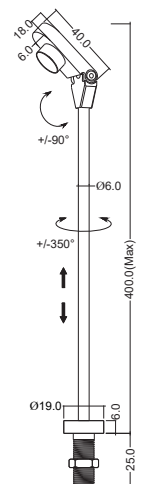

ALL ABOUT LIGHTING.

W. www.luxart.kr T. 031 591 2700 E. sales@luxart.kr A. 195-17, Biryong-ro, Hwado-eup, Namyangju-si, Gyeonggi-do, Republic of Korea